



► **TIP**
Unit heaters

TIP

Wall -and ceiling-mounted unit heaters

► [Technical catalogue](#)

Contents

| | |
|--|-----------|
| 01 ▶ Product information | 6 |
| ▶ Overview | 7 |
| ▶ Product Data | 8 |
| ▶ Selection guide | 9 |
| ▶ TIP at a glance | 10 |
| 02 ▶ Technical data | 12 |
| ▶ General | 13 |
| ▶ TIP – Heat exchanger Copper/aluminium, Model size 4, high speed | 14 |
| ▶ TIP – Heat exchanger Copper/aluminium, Model size 4, reduced speed | 16 |
| ▶ TIP – Heat exchanger Copper/aluminium, Model size 5, high speed | 18 |
| ▶ TIP – Heat exchanger Copper/aluminium, Model size 5, reduced speed | 20 |
| ▶ TIP – Heat exchanger Copper/aluminium, Model size 6, high speed | 22 |
| ▶ TIP – Heat exchanger Copper/aluminium, Model size 7, high speed | 24 |
| ▶ TIP – Heat exchanger Copper/aluminium, Model size 7, reduced speed | 26 |
| 03 ▶ Design information | 28 |
| ▶ Information on planning and design | 29 |
| 04 ▶ Control | 30 |
| ▶ Control of TIP – electromechanical model | 31 |
| 05 ▶ Ordering information | 42 |
| ▶ TIP | 42 |
| ▶ Accessories | 43 |

TIP:
The economic miracle
of unit heaters





ceiling-mounted TIP unit heaters heat the showrooms belonging to the Seyfarth car dealership in Gotha.

01 ▶ Product information



TIP – Temperature-controlled air. As much as you need.

With its TIP unit heater, Kampmann has a simple solution for the optimum centrally controlled heating and ventilation of buildings of all kinds, industrial and commercial workplaces, warehouses or greenhouses.

With a housing made of sendzimir galvanised sheet steel with threaded rods fitted as standard, TIP unit heaters are ideal for wall-mounting as well as ceiling-mounting. Their standard equipment also includes a single-row louvre and motor guard.

Operating principle

Air is drawn in through the whisper-quiet sickle-blade fan and is blown through the copper/aluminium heat exchanger into the room. The models with large heat exchanger depth are ideal for use with low temperature operation.


Air guidance

TIP unit heaters are supplied as standard with a single-row louvre. The air can optionally be discharged through a double-row louvre or air diffuser, both available as an accessory.


Available ex-stock

Four different models are available ex-stock.

Example of wall-mounted heating unit

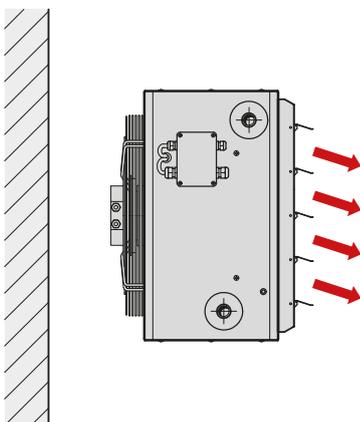

Example of ceiling-mounted heating unit

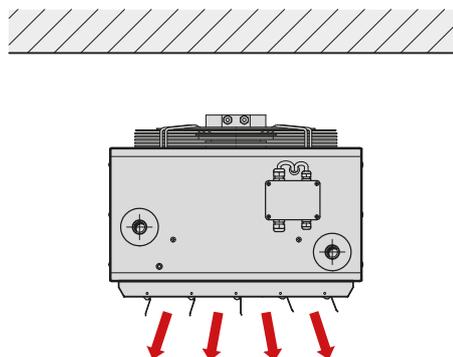

Product Data



Product benefits

- ▶ Unbeatable in terms of value for money
- ▶ Sickle-blade, whisper-quiet fan with optimised full nozzle
- ▶ Neutral in colour, hard-wearing and tough
- ▶ Fully regulable and centrally controllable
- ▶ Copper/aluminium heat exchanger, suitable for use with low water temperature systems
- ▶ Single-row ceiling or wall louvre and motor guard as standard



Features

- ▶ Continuously variable single-phase EC motor
- ▶ Copper/aluminium heat exchanger
- ▶ Four sizes
- ▶ Different air outlets are available

| | |
|---------------------|----------------------------|
| Installation | ▶ Wall- or ceiling-mounted |
| Air stream | ▶ Recirculating air |
| Heating | ▶ LPHW ▶ LPHW |
| Cooling | ▶ --- |
| Hybrid Eco | ▶ --- |
| KaControl | ▶ --- |

Performance data

Heat output [kW]¹⁾ > 4.5 – 71.0

Air flow [m³/h] > 260 – 9680

Sound pressure level [dB(A)]²⁾ > 10 – 65

Sound power level [dB(A)] > 26 – 81

¹⁾ at LPHW 75/65 °C, $t_{r1} = 20$ °C

²⁾ The sound pressure levels were calculated with an assumed room insulation of 16 dB(A). This corresponds to a distance of 5 m, a room volume of 3000 m³ and a reverberation time of 2.0 s (in accordance with VDI 2081).

Operating limits

- ▶ Max. operating pressure: 16 bar
- ▶ Max. entering water temperature: 120 °C
- ▶ Min. entering water temperature: 35 °C
- ▶ Inlet air temperature: 40 °C
- ▶ Max. glycol volume: 50 %

Applications

Buildings of all kinds, which are to be ideally heated and ventilated with centralised or decentralised control.




Selection guide


| Fan version | Model size | Width (A) [mm] | Dimensions Height (B) [mm] | Depth (C) [mm] | Heat exchanger model Copper/aluminium | |
|------------------------------|------------|-------------------|----------------------------------|-------------------|--|---------------------------------|
| | | | | | Heat output ¹⁾ [kW] | Air flow [m ³ /h] |
| EC fan, 230 V, high speed | 4 | 540 | 500 | 320 | 6.4 – 18.5 | 520 – 2720 |
| | 5 | 640 | 600 | | 4.5 – 37.0 | 260 – 4860 |
| | 6 | 740 | 700 | | 7.0 – 48.5 | 430 – 6900 |
| | 7 | 840 | 800 | 360 | 14.2 – 71.0 | 970 – 9680 |
| EC fan, 230 V, reduced speed | 4 | 540 | 500 | 320 | 5.7 – 15.4 | 450 – 2210 |
| | 5 | 640 | 600 | | 6.6 – 26.0 | 480 – 3370 |
| | 7 | 840 | 800 | 360 | 10.6 – 55.8 | 590 – 7820 |

¹⁾ at LPHW 75/65 °C, $t_{11} = 20$ °C

Technical drawing (Dimensions in mm)

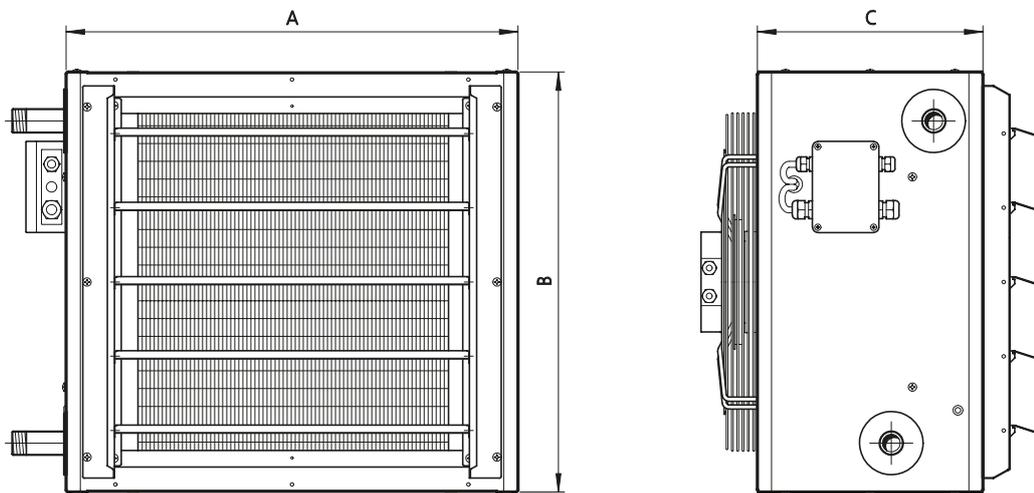

TIP at a glance

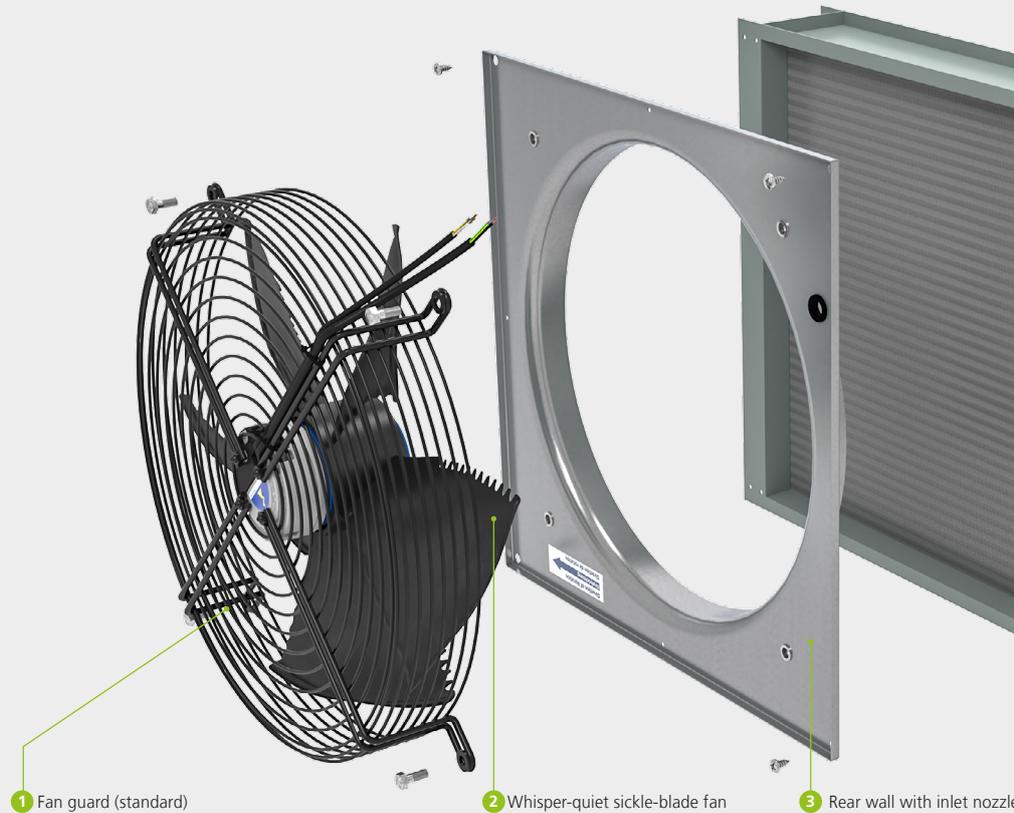

Features

- 1 Fan guard (standard):**

 - ▶ screw-fixed as standard with whisper-quiet sickle-blade fan
- 2 Whisper-quiet, sickle-blade fan, ErP 2015-compliant:**


 - ▶ continuously variable EC single-phase whisper-quiet sickle-blade fan
 - ▶ excellent efficiency due to the aerodynamic design of the rotor housing
 - ▶ electrical thermal class F model
 - ▶ motor protection: IP 54
 - ▶ balanced at two levels; balancing quality according to G6, 3 DIN ISO 1940 Part 1
- 3 Rear wall with inlet nozzle:**

 - ▶ inlet nozzle optimised to the flow characteristics of the fan
- 4 Heat exchanger:**



 - ▶ copper/aluminium heat exchanger, especially lightweight, with high heat outputs from minimal dimensions
 - ▶ suitable for low temperature heating systems and LPHW heating systems
 - ▶ steel distributor and collector
 - ▶ not suitable for steam and thermal oil
 - ▶ hollow copper tubes with aluminium fins, connected by expanded pipes, perfect for lasting heat transfer
 - ▶ cannot be used in areas with high levels of dust or oil in which extensive cleaning is needed
- 5 Unit heater housing:**

 - ▶ self-supporting, made of galvanised sheet steel
 - ▶ standard fixing holes for wall or ceiling-mounting
 - ▶ resistant to damage
 - ▶ shallow depth, ideal for the simple attachment of outlet-side accessories
- 6 Single-row air louvre (standard):**

 - ▶ for wall or ceiling-mounting
 - ▶ achieves excellent throw

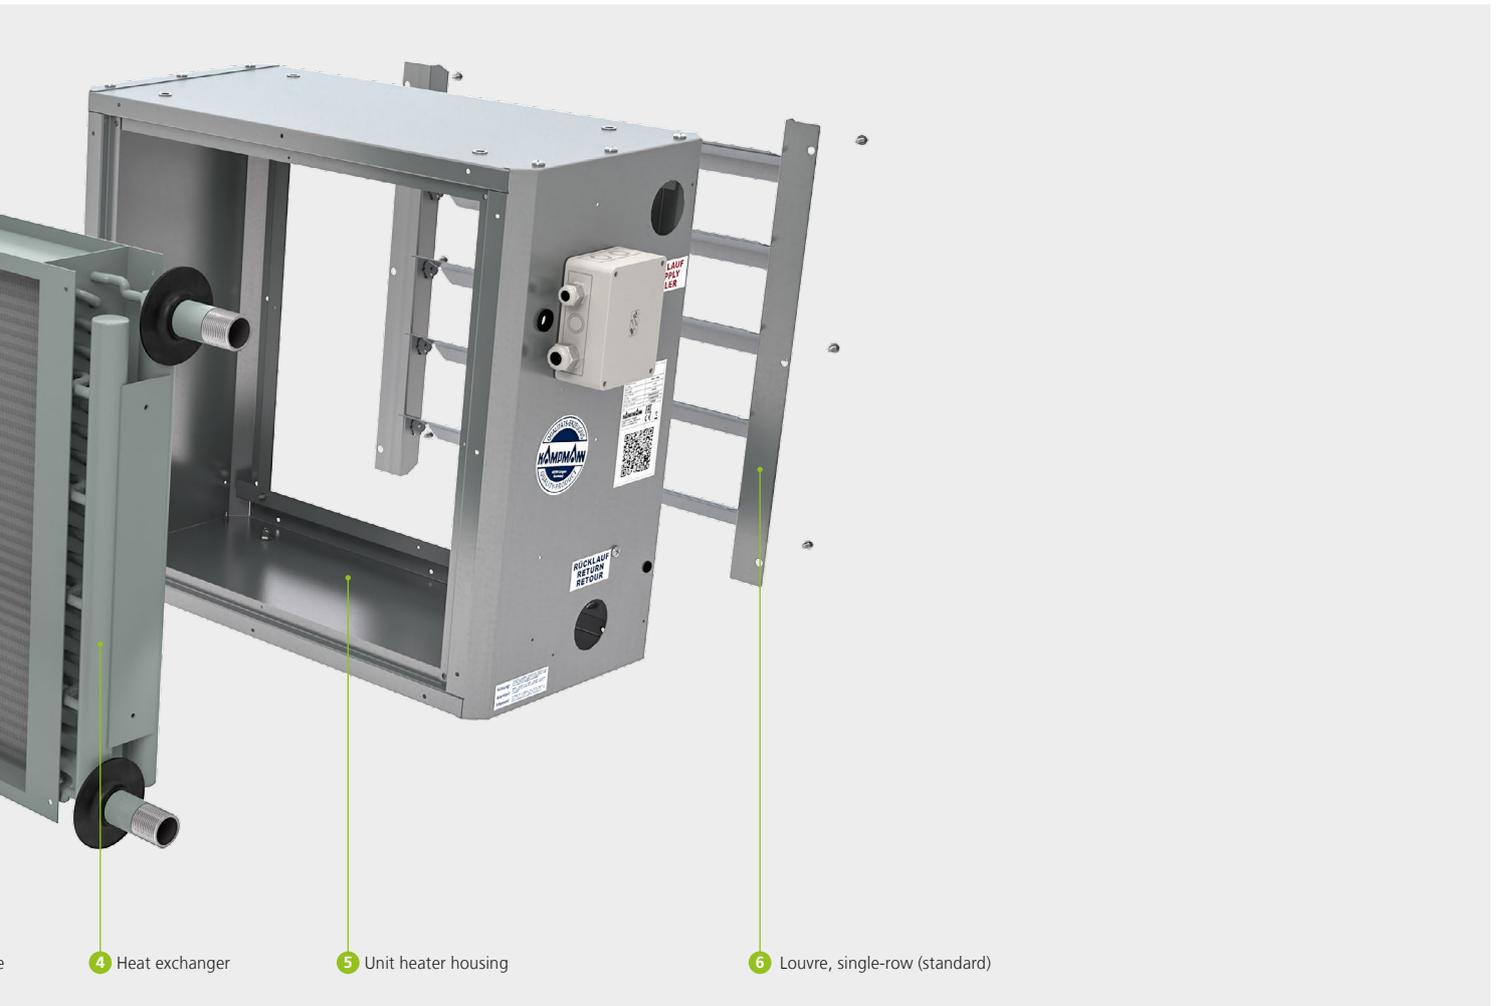

02 ▶ Technical data

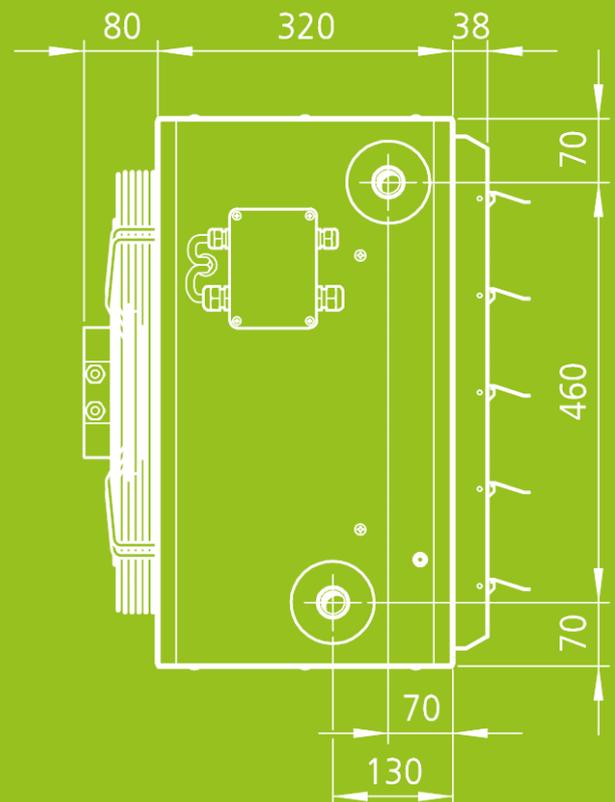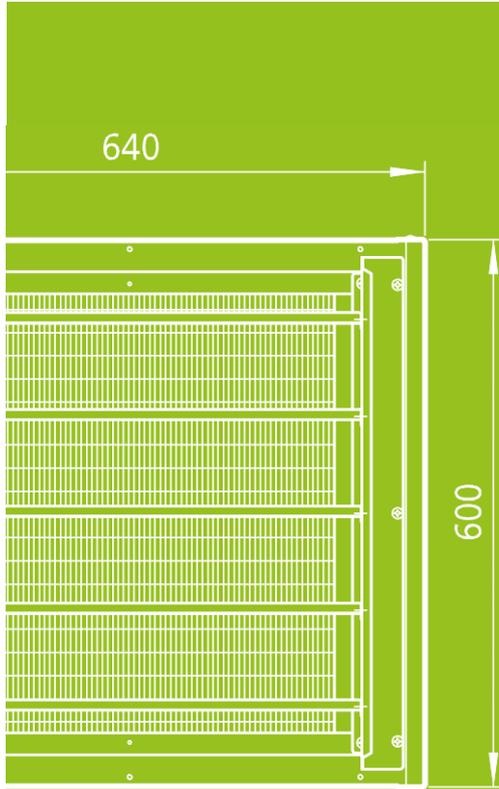

General

EU Directive 2009/125/EU

Compliance with the ErP Directive 2015

The European Commission's ErP Directive ("Energy-related Products") evaluates and modifies the requirements of technical products in energy-related applications. According to the Directive (EU) 327/2011 ("LOT 11"), the efficiency requirements have become more stringent for fans with an electric drive output of 125 watts to 500 kilowatts. A number of fans can no longer be marketed since the second stage entered into force on 1st January 2015. The inlet nozzle used in the unit must be taken into account along with the fan, in terms of energy.

The TIP range of unit heaters is solely fitted with ErP-compliant fans. The conformity of the TIP range has been laboratory-tested and proved. The measurements can be provided on request.

The TIP unit heater range and components used are produced and tested in line with the applicable state of the art. The requirements of the applicable norms, e.g. Machinery Directive, EN60335 (Safety of Electrical Equipment) and EMC are all met.




Test chamber for air performance measurements according to DIN EN ISO 5801, Kampmann R&D Centre

TIP

Heat exchanger Copper/aluminium Model size 4

EC fan, 230 V, high speed

Technical drawing (Dimensions in mm)

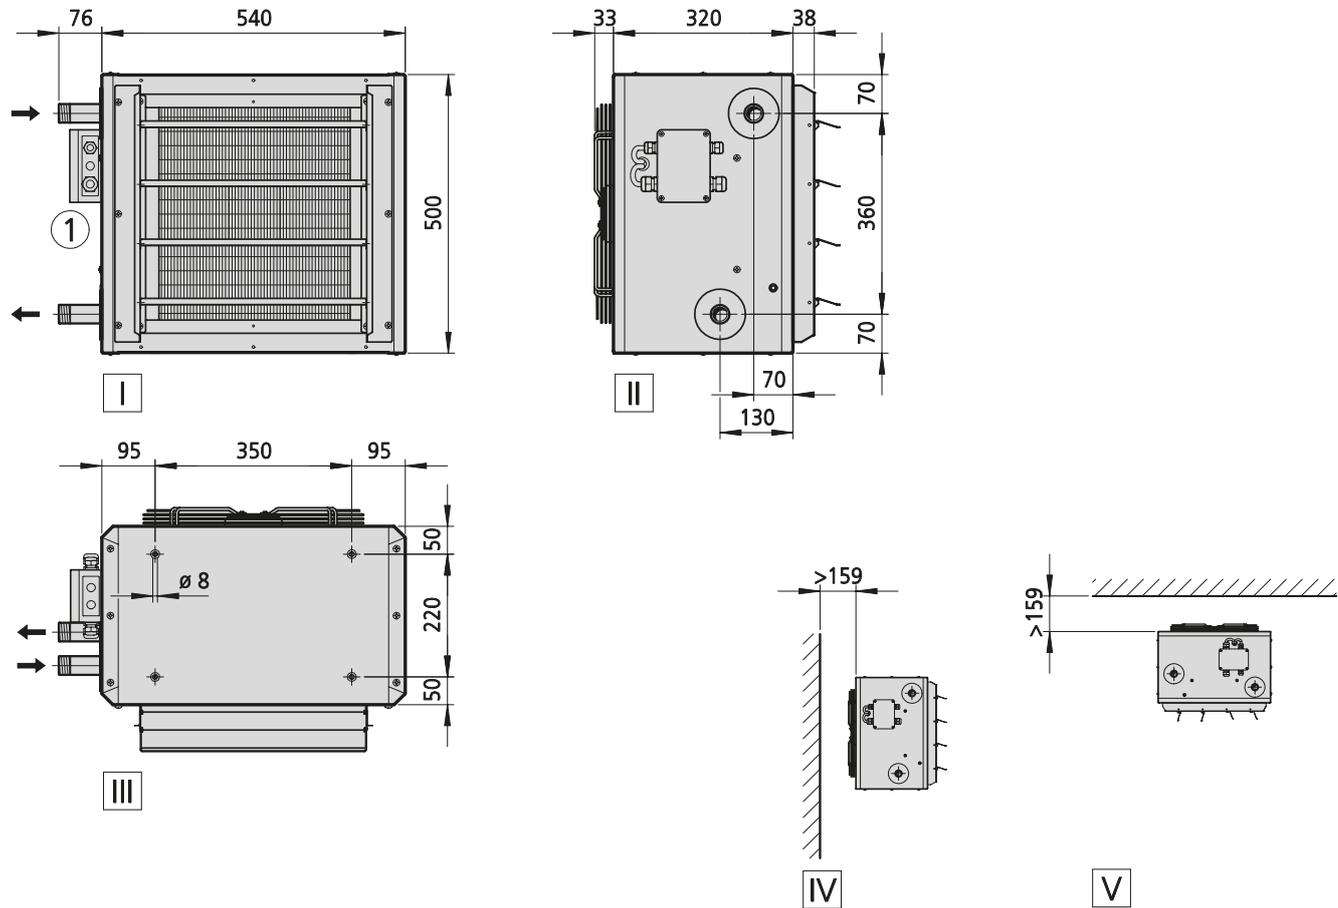

- View**
- I Front view
 - II Side view
 - III Top view
 - IV wall-mounted
 - V ceiling-mounted

More information

① Electrical connection for EC model, electromechanical

Specifications

| Type | Weight [kg] | Water content [l] | Connection |
|--------|-------------|-------------------|------------|
| 542058 | 23 | 1.6 | 1" |
| 543058 | 22 | 2.1 | 1" |
| 544058 | 24 | 2.6 | 1" |

Performance data

| Type | Inlet air temperature | Control voltage | Heat output ¹⁾ | Outlet air temperature | Air flow | Nominal fan speed | Power consumption | Amperage | Throw (wall-mounted) | Maximum installation height when ceiling-mounted | | Sound pressure level ²⁾ | Sound power level |
|--------|-----------------------|-----------------|---------------------------|------------------------|----------|-------------------|-------------------|----------|----------------------|--|--------------|------------------------------------|-------------------|
| | | | | | | | | | | Louvre | Air diffuser | | |
| | [°C] | [V] | [kW] | [°C] | [m³/h] | [1/min] | [W] | [A] | [m] | [m] | [m] | [dB(A)] | [dB(A)] |
| 542058 | 20 | 10 | 12.9 | 34.4 | 2720 | 1520 | 165 | 1.5 | 21.0 | 6.1 | 3.9 | 57 | 73 |
| | | 8 | 11.7 | 35.5 | 2270 | 1290 | 99 | 1.0 | 18.0 | 5.4 | 3.5 | 52 | 68 |
| | | 6 | 10.0 | 37.6 | 1710 | 1000 | 46 | 0.5 | 13.0 | 4.5 | 3.0 | 46 | 62 |
| | | 4 | 8.3 | 40.8 | 1200 | 735 | 22 | 0.3 | 9.0 | 3.6 | 2.4 | 38 | 54 |
| | | 2 | 6.8 | 42.0 | 790 | 525 | 12 | 0.2 | 6.0 | 2.8 | --- | 29 | 45 |
| 543058 | 20 | 10 | 15.2 | 38.7 | 2460 | 1520 | 165 | 1.5 | 19.0 | 5.7 | 3.7 | 55 | 71 |
| | | 8 | 13.6 | 40.0 | 2050 | 1290 | 99 | 1.0 | 16.0 | 5.1 | 3.3 | 50 | 66 |
| | | 6 | 11.3 | 42.3 | 1530 | 1000 | 46 | 0.5 | 12.0 | 4.2 | 2.8 | 44 | 60 |
| | | 4 | 9.1 | 46.2 | 1050 | 735 | 22 | 0.3 | 8.0 | 3.3 | 2.3 | 36 | 52 |
| | | 2 | 7.3 | 47.6 | 680 | 525 | 12 | 0.2 | 5.0 | 2.5 | --- | 27 | 43 |
| 544058 | 20 | 10 | 18.5 | 47.4 | 2040 | 1520 | 165 | 1.5 | 16.0 | 5.1 | 3.3 | 53 | 69 |
| | | 8 | 15.8 | 48.3 | 1690 | 1290 | 99 | 1.0 | 13.0 | 4.5 | 3.0 | 48 | 64 |
| | | 6 | 12.3 | 49.9 | 1250 | 1000 | 46 | 0.5 | 10.0 | 3.7 | 2.5 | 42 | 58 |
| | | 4 | 9.0 | 52.4 | 840 | 735 | 22 | 0.3 | 6.0 | 2.9 | --- | 34 | 50 |
| | | 2 | 6.4 | 53.3 | 520 | 525 | 12 | 0.2 | 4.0 | --- | --- | 25 | 41 |

Use our calculation tools on our website to easily calculate heat outputs and other technical data with just a few clicks!

► <https://www.kampmanngroup.com/hvac/products/unit-heaters/tip#Calculate-performance-data>

¹⁾ at LPHW 75/65 °C, $t_{\text{r}} = 20$ °C


²⁾ The sound pressure levels were calculated with an assumed room insulation of 16 dB(A). This corresponds to a distance of 5 m, a room volume of 3000 m³ and a reverberation time of 2.0 s (in accordance with VDI 2081).

TIP

Heat exchanger Copper/aluminium Model size 4

EC fan, 230 V, reduced speed

Technical drawing (Dimensions in mm)

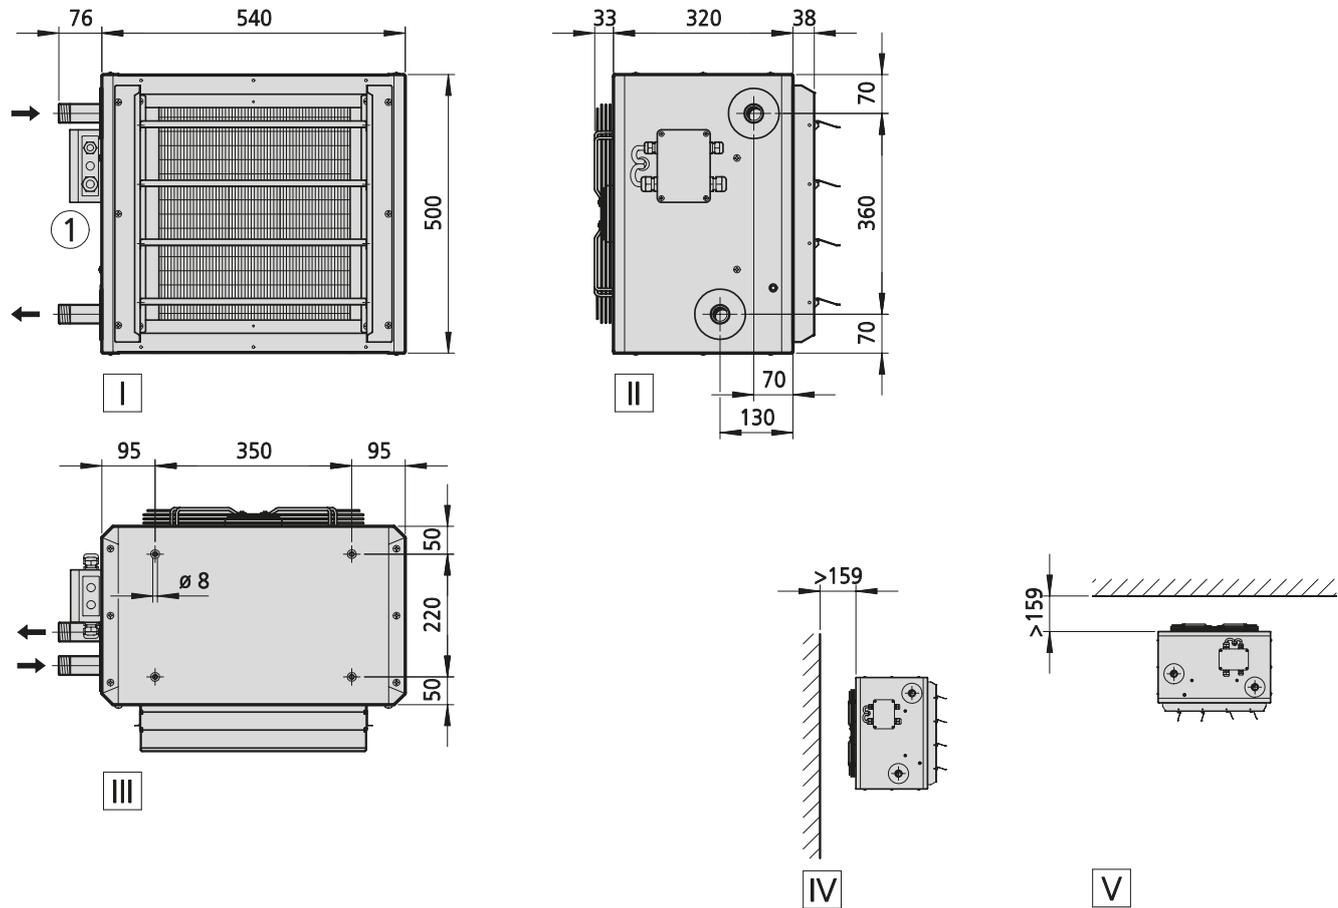

- View**
- I Front view
 - II Side view
 - III Top view
 - IV wall-mounted
 - V ceiling-mounted

More information

- ① Electrical connection for EC model, electromechanical

Specifications

| Type | Weight [kg] | Water content [l] | Connection |
|--------|-------------|-------------------|------------|
| 542056 | 22 | 1.6 | 1" |
| 543056 | 22 | 2.1 | 1" |
| 544056 | 24 | 2.6 | 1" |

Performance data

| Type | Inlet air temperature | Control voltage | Heat output ¹⁾ | Outlet air temperature | Air flow | Nominal fan speed | Power consumption | Amperage | Throw (wall-mounted) | Maximum installation height when ceiling-mounted | | Sound pressure level ²⁾ | Sound power level |
|--------|-----------------------|-----------------|---------------------------|------------------------|----------|-------------------|-------------------|----------|----------------------|--|--------------|------------------------------------|-------------------|
| | | | | | | | | | | Louvre | Air diffuser | | |
| | [°C] | [V] | [kW] | [°C] | [m³/h] | [1/min] | [W] | [A] | [m] | [m] | [m] | [dB(A)] | [dB(A)] |
| 542056 | 20 | 10 | 11.5 | 35.7 | 2210 | 1410 | 124 | 1.2 | 17.0 | 5.3 | 3.5 | 55 | 71 |
| | | 8 | 10.2 | 37.2 | 1790 | 1150 | 64 | 0.7 | 14.0 | 4.7 | 3.1 | 50 | 66 |
| | | 6 | 8.9 | 39.3 | 1390 | 905 | 32 | 0.4 | 11.0 | 4.0 | 2.7 | 43 | 59 |
| | | 4 | 7.6 | 42.8 | 1000 | 665 | 14 | 0.2 | 8.0 | 3.2 | --- | 35 | 51 |
| | | 2 | 6.5 | 43.9 | 700 | 480 | 7 | 0.1 | 5.0 | 2.6 | --- | 26 | 42 |
| 543056 | 20 | 10 | 13.3 | 40.2 | 1980 | 1410 | 124 | 1.2 | 15.0 | 5.0 | 3.3 | 53 | 69 |
| | | 8 | 11.6 | 42.0 | 1600 | 1150 | 64 | 0.7 | 12.0 | 4.3 | 2.9 | 48 | 64 |
| | | 6 | 10.0 | 44.4 | 1230 | 905 | 32 | 0.4 | 10.0 | 3.7 | 2.5 | 41 | 57 |
| | | 4 | 8.3 | 48.6 | 880 | 665 | 14 | 0.2 | 7.0 | 3.0 | --- | 33 | 49 |
| | | 2 | 7.0 | 49.9 | 600 | 480 | 7 | 0.1 | 5.0 | 2.3 | --- | 24 | 40 |
| 544056 | 20 | 10 | 15.4 | 48.4 | 1640 | 1410 | 124 | 1.2 | 13.0 | 4.4 | 2.9 | 51 | 67 |
| | | 8 | 12.8 | 49.6 | 1300 | 1150 | 64 | 0.7 | 10.0 | 3.8 | 2.6 | 46 | 62 |
| | | 6 | 10.3 | 51.2 | 990 | 905 | 32 | 0.4 | 8.0 | 3.2 | --- | 39 | 55 |
| | | 4 | 7.7 | 54.0 | 680 | 665 | 14 | 0.2 | 5.0 | 2.5 | --- | 31 | 47 |
| | | 2 | 5.7 | 54.9 | 450 | 480 | 7 | 0.1 | 3.0 | --- | --- | 22 | 38 |

Use our calculation tools on our website to easily calculate heat outputs and other technical data with just a few clicks!

► <https://www.kampmanngroup.com/hvac/products/unit-heaters/tip#Calculate-performance-data>


¹⁾ at LPHW 75/65 °C, $t_{\text{r}} = 20$ °C

²⁾ The sound pressure levels were calculated with an assumed room insulation of 16 dB(A). This corresponds to a distance of 5 m, a room volume of 3000 m³ and a reverberation time of 2.0 s (in accordance with VDI 2081).

TIP

Heat exchanger Copper/aluminium Model size 5 EC fan, 230 V, high speed

Technical drawing (Dimensions in mm)

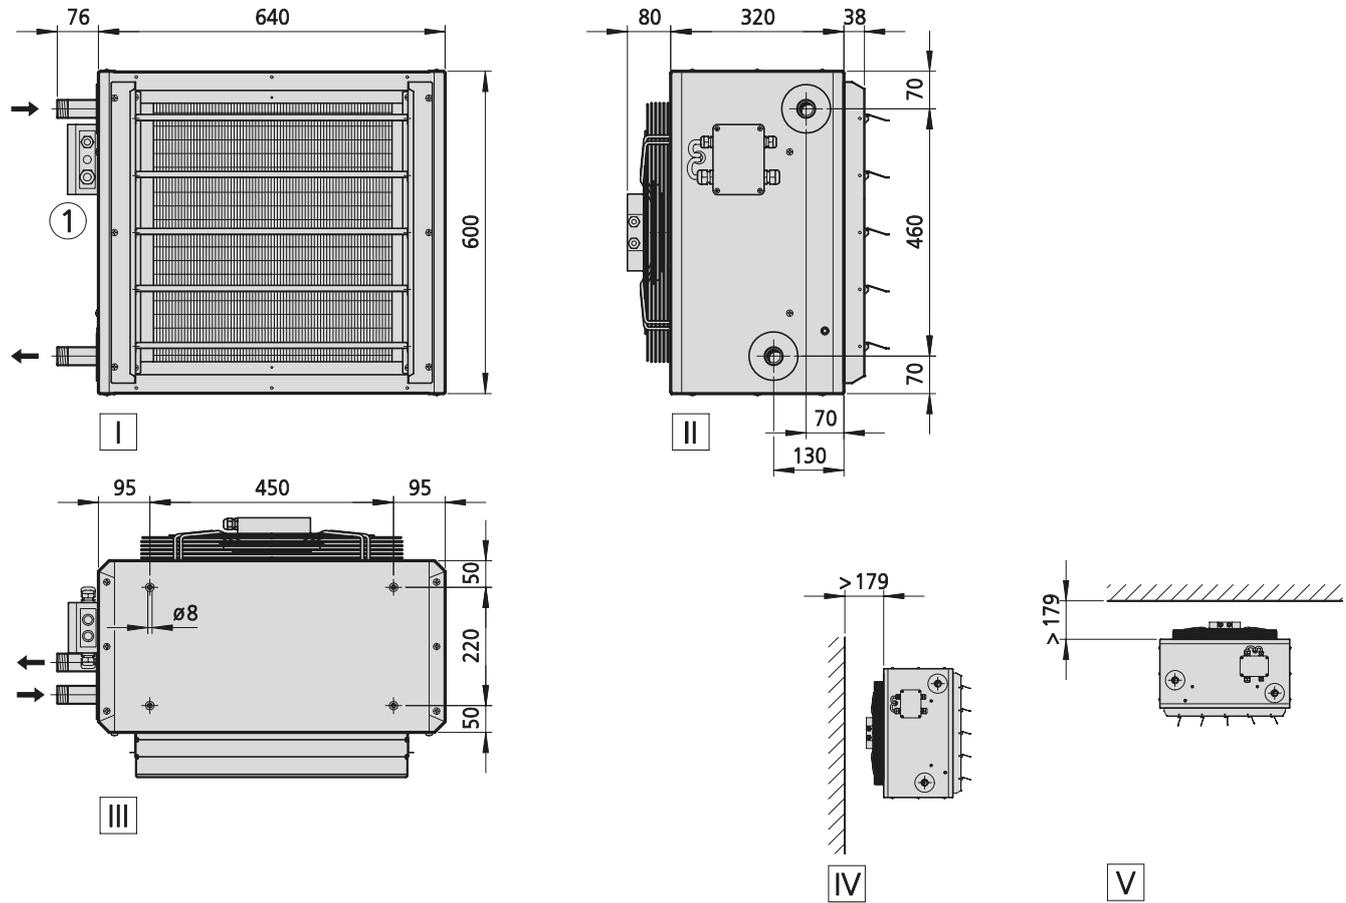

Specifications

| Type | Weight [kg] | Water content [l] | Connection |
|--------|-------------|-------------------|------------|
| 552058 | 32 | 2.2 | 1" |
| 553058 | 32 | 3.0 | 1" |
| 554058 | 34 | 3.8 | 1" |

Performance data

| Type | Inlet air temperature | Control voltage | Heat output ¹⁾ | Outlet air temperature | Air flow | Nominal fan speed | Power consumption | Amperage | Throw (wall-mounted) | Maximum installation height when ceiling-mounted | | Sound pressure level ²⁾ | Sound power level |
|--------|-----------------------|-----------------|---------------------------|------------------------|----------|-------------------|-------------------|----------|----------------------|--|--------------|------------------------------------|-------------------|
| | | | | | | | | | | Louvre | Air diffuser | | |
| | [°C] | [V] | [kW] | [°C] | [m³/h] | [1/min] | [W] | [A] | [m] | [m] | [m] | [dB(A)] | [dB(A)] |
| 552058 | 20 | 10 | 23.9 | 34.8 | 4860 | 1470 | 400 | 1.8 | 26.0 | 7.2 | 4.6 | 65 | 81 |
| | | 8 | 20.4 | 36.0 | 3840 | 1180 | 208 | 0.9 | 21.0 | 6.2 | 4.1 | 59 | 75 |
| | | 6 | 16.2 | 37.9 | 2740 | 865 | 88 | 0.4 | 15.0 | 5.1 | 3.4 | 50 | 66 |
| | | 4 | 11.8 | 41.8 | 1630 | 550 | 20 | 0.2 | 8.0 | 3.7 | 2.5 | 40 | 56 |
| | | 2 | 7.1 | 43.4 | 520 | 235 | 10 | 0.1 | 2.0 | --- | --- | 18 | 34 |
| 553058 | 20 | 10 | 28.7 | 39.2 | 4500 | 1470 | 400 | 1.8 | 24.0 | 6.9 | 4.4 | 63 | 79 |
| | | 8 | 24.1 | 40.5 | 3540 | 1180 | 208 | 0.9 | 19.0 | 5.9 | 3.9 | 57 | 73 |
| | | 6 | 18.7 | 42.5 | 2500 | 865 | 88 | 0.4 | 13.0 | 4.8 | 3.2 | 48 | 64 |
| | | 4 | 13.0 | 46.8 | 1460 | 550 | 20 | 0.2 | 7.0 | 3.5 | 2.4 | 38 | 54 |
| | | 2 | 6.8 | 48.5 | 420 | 235 | 10 | 0.1 | 2.0 | --- | --- | 16 | 32 |
| 554058 | 20 | 10 | 37.0 | 48.9 | 3860 | 1470 | 400 | 1.8 | 21.0 | 6.3 | 4.1 | 61 | 77 |
| | | 8 | 29.9 | 49.9 | 3010 | 1180 | 208 | 0.9 | 16.0 | 5.4 | 3.5 | 55 | 71 |
| | | 6 | 21.8 | 51.4 | 2100 | 865 | 88 | 0.4 | 11.0 | 4.3 | 2.9 | 46 | 62 |
| | | 4 | 13.4 | 54.2 | 1180 | 550 | 20 | 0.2 | 6.0 | 3.0 | --- | 36 | 52 |
| | | 2 | 4.5 | 55.5 | 260 | 235 | 10 | 0.1 | 1.0 | --- | --- | 14 | 30 |

Use our calculation tools on our website to easily calculate heat outputs and other technical data with just a few clicks!
 ▶ <https://www.kampmanngroup.com/hvac/products/unit-heaters/tip#Calculate-performance-data>

¹⁾ at LPHW 75/65 °C, $t_{\text{r}} = 20$ °C


²⁾ The sound pressure levels were calculated with an assumed room insulation of 16 dB(A). This corresponds to a distance of 5 m, a room volume of 3000 m³ and a reverberation time of 2.0 s (in accordance with VDI 2081).

TIP

Heat exchanger Copper/aluminium Model size 5

EC fan, 230 V, reduced speed

Technical drawing (Dimensions in mm)

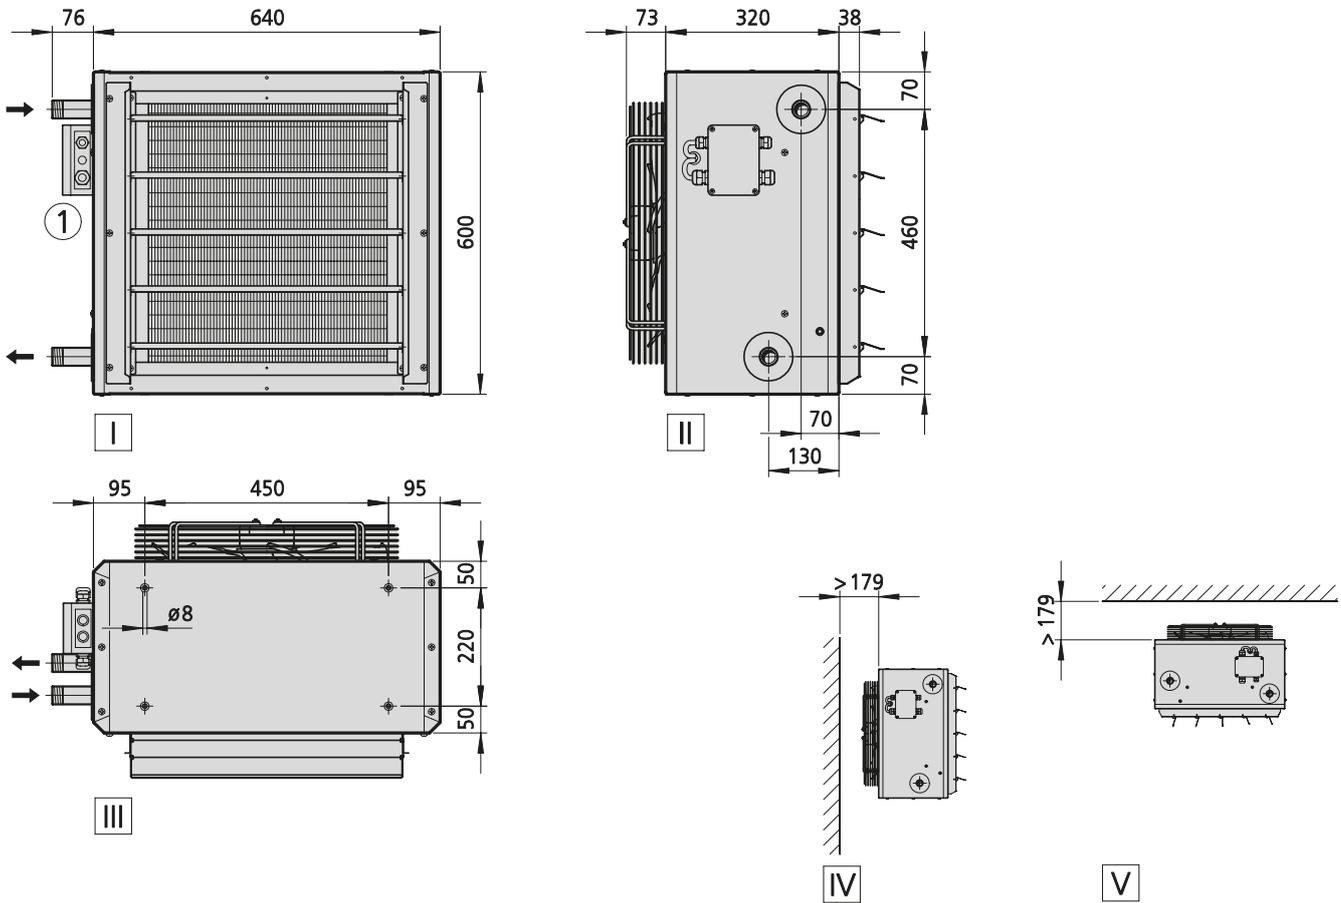

View

- I Front view
- II Side view
- III Top view
- IV wall-mounted
- V ceiling-mounted

More information

- ① Electrical connection for EC model, electromechanical

Specifications

| Type | Weight [kg] | Water content [l] | Connection |
|--------|-------------|-------------------|------------|
| 552056 | 30 | 2.2 | 1" |
| 553056 | 30 | 3.0 | 1" |
| 554056 | 32 | 3.8 | 1" |

Performance data

| Type | Inlet air temperature | Control voltage | Heat output ¹⁾ | Outlet air temperature | Air flow | Nominal fan speed | Power consumption | Amperage | Throw (wall-mounted) | Maximum installation height when ceiling-mounted | | Sound pressure level ²⁾ | Sound power level |
|--------|-----------------------|-----------------|---------------------------|------------------------|----------|-------------------|-------------------|----------|----------------------|--|--------------|------------------------------------|-------------------|
| | | | | | | | | | | Louvre | Air diffuser | | |
| | [°C] | [V] | [kW] | [°C] | [m³/h] | [1/min] | [W] | [A] | [m] | [m] | [m] | [dB(A)] | [dB(A)] |
| 552056 | 20 | 10 | 18.6 | 36.6 | 3370 | 1080 | 162 | 1.5 | 18.0 | 5.8 | 3.8 | 56 | 72 |
| | | 8 | 16.5 | 37.7 | 2810 | 925 | 93 | 1.0 | 15.0 | 5.2 | 3.4 | 52 | 68 |
| | | 6 | 13.5 | 39.8 | 2060 | 720 | 46 | 0.5 | 11.0 | 4.3 | 2.9 | 45 | 61 |
| | | 4 | 10.7 | 43.6 | 1360 | 530 | 22 | 0.3 | 7.0 | 3.3 | 2.3 | 36 | 52 |
| | | 2 | 8.3 | 44.9 | 810 | 380 | 11 | 0.2 | 4.0 | 2.4 | --- | 27 | 43 |
| 553056 | 20 | 10 | 21.6 | 41.3 | 3060 | 1080 | 162 | 1.5 | 16.0 | 5.4 | 3.6 | 54 | 70 |
| | | 8 | 18.9 | 42.5 | 2530 | 925 | 93 | 1.0 | 13.0 | 4.8 | 3.2 | 50 | 66 |
| | | 6 | 15.1 | 44.8 | 1830 | 720 | 46 | 0.5 | 10.0 | 4.0 | 2.7 | 43 | 59 |
| | | 4 | 11.4 | 48.9 | 1190 | 530 | 22 | 0.3 | 6.0 | 3.0 | --- | 34 | 50 |
| | | 2 | 8.4 | 50.3 | 680 | 380 | 11 | 0.2 | 3.0 | --- | --- | 25 | 41 |
| 554056 | 20 | 10 | 26.0 | 50.6 | 2560 | 1080 | 162 | 1.5 | 14.0 | 4.9 | 3.2 | 52 | 68 |
| | | 8 | 21.8 | 51.4 | 2100 | 925 | 93 | 1.0 | 11.0 | 4.3 | 2.9 | 48 | 64 |
| | | 6 | 16.3 | 52.9 | 1490 | 720 | 46 | 0.5 | 8.0 | 3.5 | 2.4 | 41 | 57 |
| | | 4 | 10.9 | 55.7 | 920 | 530 | 22 | 0.3 | 4.0 | 2.6 | --- | 32 | 48 |
| | | 2 | 6.6 | 56.6 | 480 | 380 | 11 | 0.2 | 2.0 | --- | --- | 23 | 39 |

Use our calculation tools on our website to easily calculate heat outputs and other technical data with just a few clicks!

► <https://www.kampmanngroup.com/hvac/products/unit-heaters/tip#Calculate-performance-data>

¹⁾ at LPHW 75/65 °C, $t_{\text{r}} = 20$ °C


²⁾ The sound pressure levels were calculated with an assumed room insulation of 16 dB(A). This corresponds to a distance of 5 m, a room volume of 3000 m³ and a reverberation time of 2.0 s (in accordance with VDI 2081).

TIP

Heat exchanger Copper/aluminium Model size 6

EC fan, 230 V, high speed

Technical drawing (Dimensions in mm)

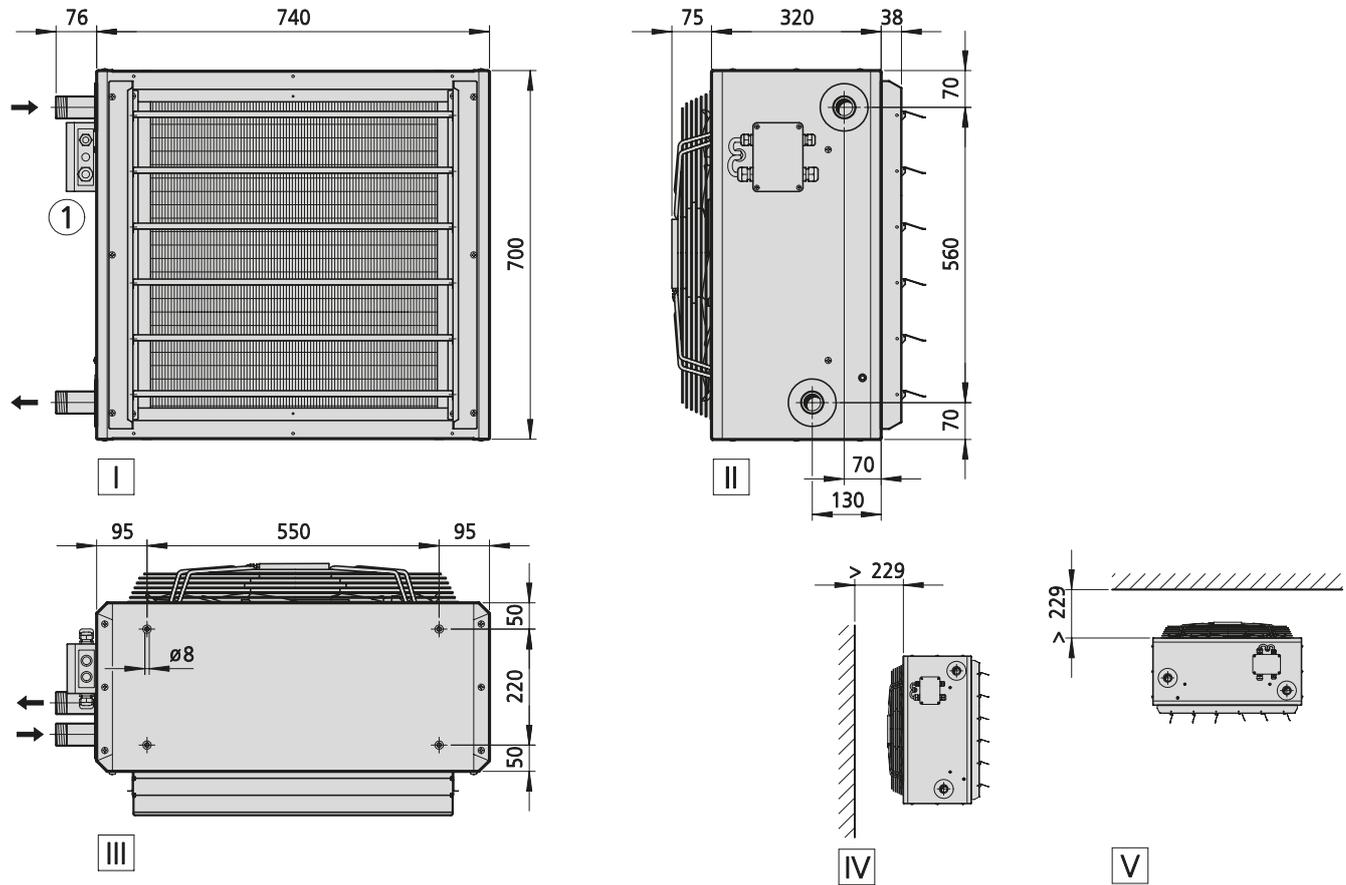

- View**
- I Front view
 - II Side view
 - III Top view
 - IV wall-mounted
 - V ceiling-mounted

More information

① Electrical connection for EC model, electromechanical

Specifications

| Type | Weight [kg] | Water content [l] | Connection |
|--------|-------------|-------------------|------------|
| 562058 | 44 | 3.4 | 1 1/4" |
| 563058 | 46 | 4.5 | 1 1/4" |
| 564058 | 49 | 5.6 | 1 1/4" |

Performance data

| Type | Inlet air temperature | Control voltage | Heat output ¹⁾ | Outlet air temperature | Air flow | Nominal fan speed | Power consumption | Amperage | Throw (wall-mounted) | Maximum installation height when ceiling-mounted | | Sound pressure level ²⁾ | Sound power level |
|---------------|-----------------------|-----------------|---------------------------|------------------------|----------|-------------------|-------------------|----------|----------------------|--|--------------|------------------------------------|-------------------|
| | | | | | | | | | | Louvre | Air diffuser | | |
| | [°C] | [V] | [kW] | [°C] | [m³/h] | [1/min] | [W] | [A] | [m] | [m] | [m] | [dB(A)] | [dB(A)] |
| 562058 | 20 | 10 | 32.0 | 34.0 | 6900 | 990 | 420 | 1.8 | 32.0 | 8.0 | 4.7 | 64 | 80 |
| | | 8 | 27.2 | 35.1 | 5440 | 790 | 218 | 1.0 | 25.0 | 7.0 | 4.2 | 58 | 74 |
| | | 6 | 21.8 | 36.8 | 3910 | 580 | 89 | 0.4 | 18.0 | 5.7 | 3.5 | 50 | 66 |
| | | 4 | 16.1 | 40.4 | 2380 | 370 | 28 | 0.2 | 11.0 | 4.2 | 2.7 | 39 | 55 |
| | | 2 | 10.1 | 41.9 | 850 | 160 | 20 | 0.1 | 3.0 | 2.3 | --- | 18 | 34 |
| 563058 | 20 | 10 | 40.5 | 41.3 | 5730 | 990 | 420 | 1.8 | 27.0 | 7.2 | 4.3 | 62 | 78 |
| | | 8 | 33.7 | 42.7 | 4480 | 790 | 218 | 1.0 | 21.0 | 6.2 | 3.7 | 56 | 72 |
| | | 6 | 26.0 | 44.8 | 3160 | 580 | 89 | 0.4 | 14.0 | 5.0 | 3.1 | 48 | 64 |
| | | 4 | 17.8 | 49.0 | 1850 | 370 | 28 | 0.2 | 8.0 | 3.7 | 2.3 | 37 | 53 |
| | | 2 | 9.0 | 50.8 | 530 | 160 | 20 | 0.1 | 2.0 | --- | --- | 16 | 32 |
| 564058 | 20 | 10 | 48.5 | 49.8 | 4900 | 990 | 420 | 1.8 | 23.0 | 6.5 | 3.9 | 60 | 76 |
| | | 8 | 39.2 | 50.9 | 3830 | 790 | 218 | 1.0 | 17.0 | 5.6 | 3.4 | 54 | 70 |
| | | 6 | 29.0 | 52.4 | 2690 | 580 | 89 | 0.4 | 12.0 | 4.6 | 2.8 | 46 | 62 |
| | | 4 | 18.2 | 55.2 | 1560 | 370 | 28 | 0.2 | 7.0 | 3.3 | --- | 35 | 51 |
| | | 2 | 7.0 | 56.5 | 430 | 160 | 20 | 0.1 | 1.0 | --- | --- | 14 | 30 |

Use our calculation tools on our website to easily calculate heat outputs and other technical data with just a few clicks!

► <https://www.kampmanngroup.com/hvac/products/unit-heaters/tip#Calculate-performance-data>

¹⁾ at LPHW 75/65 °C, $t_{\text{r}} = 20$ °C


²⁾ The sound pressure levels were calculated with an assumed room insulation of 16 dB(A). This corresponds to a distance of 5 m, a room volume of 3000 m³ and a reverberation time of 2.0 s (in accordance with VDI 2081).

TIP

Heat exchanger Copper/aluminium Model size 7

EC fan, 230 V, high speed

Technical drawing (Dimensions in mm)

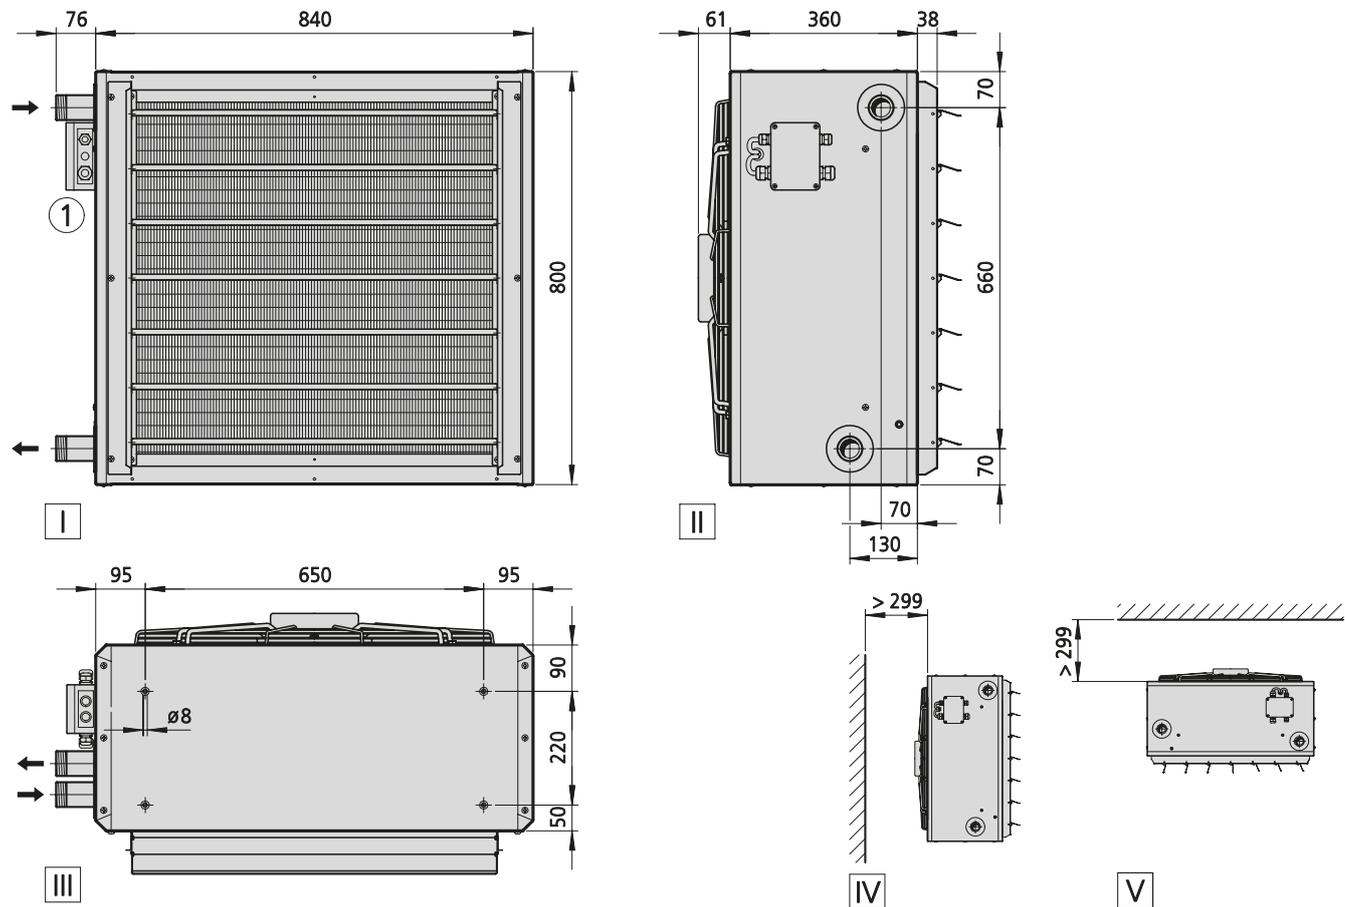

View

- I Front view
- II Side view
- III Top view
- IV wall-mounted
- V ceiling-mounted

More information

- ① Electrical connection for EC model, electromechanical

Specifications

| Type | Weight [kg] | Water content [l] | Connection |
|--------|-------------|-------------------|------------|
| 572058 | 55 | 4.8 | 1 1/2" |
| 573058 | 59 | 6.2 | 1 1/2" |
| 574058 | 61 | 7.6 | 1 1/2" |

Performance data

| Type | Inlet air temperature | Control voltage | Heat output ¹⁾ | Outlet air temperature | Air flow | Nominal fan speed | Power consumption | Amperage | Throw (wall-mounted) | Maximum installation height when ceiling-mounted | | Sound pressure level ²⁾ | Sound power level |
|---------------|-----------------------|-----------------|---------------------------|------------------------|----------|-------------------|-------------------|----------|----------------------|--|--------------|------------------------------------|-------------------|
| | | | | | | | | | | Louvre | Air diffuser | | |
| | [°C] | [V] | [kW] | [°C] | [m³/h] | [1/min] | [W] | [A] | [m] | [m] | [m] | [dB(A)] | [dB(A)] |
| 572058 | 20 | 10 | 42.7 | 33.3 | 9680 | 1000 | 685 | 3.0 | 40.0 | 8.5 | 4.7 | 65 | 81 |
| | | 8 | 37.7 | 34.1 | 8050 | 835 | 361 | 1.6 | 33.0 | 7.6 | 4.3 | 60 | 76 |
| | | 6 | 31.0 | 35.7 | 5960 | 625 | 152 | 0.7 | 24.0 | 6.4 | 3.7 | 52 | 68 |
| | | 4 | 23.1 | 39.2 | 3630 | 390 | 50 | 0.3 | 14.0 | 4.8 | 2.8 | 40 | 56 |
| | | 2 | 15.3 | 40.8 | 1450 | 170 | 13 | 0.3 | 4.0 | 2.8 | --- | 18 | 34 |
| 573058 | 20 | 10 | 52.7 | 38.6 | 8560 | 1000 | 685 | 3.0 | 35.0 | 7.9 | 4.4 | 63 | 79 |
| | | 8 | 46.2 | 39.6 | 7100 | 835 | 361 | 1.6 | 29.0 | 7.1 | 4.0 | 58 | 74 |
| | | 6 | 37.4 | 41.5 | 5250 | 625 | 152 | 0.7 | 21.0 | 6.0 | 3.4 | 50 | 66 |
| | | 4 | 27.0 | 45.7 | 3170 | 390 | 50 | 0.3 | 12.0 | 4.4 | 2.6 | 38 | 54 |
| | | 2 | 16.7 | 47.7 | 1230 | 170 | 13 | 0.3 | 3.0 | 2.6 | --- | 16 | 32 |
| 574058 | 20 | 10 | 71.0 | 48.2 | 7600 | 1000 | 685 | 3.0 | 31.0 | 7.4 | 4.2 | 61 | 77 |
| | | 8 | 60.6 | 49.1 | 6280 | 835 | 361 | 1.6 | 25.0 | 6.6 | 3.8 | 56 | 72 |
| | | 6 | 46.7 | 50.6 | 4600 | 625 | 152 | 0.7 | 18.0 | 5.5 | 3.2 | 48 | 64 |
| | | 4 | 30.3 | 53.5 | 2730 | 390 | 50 | 0.3 | 10.0 | 4.1 | 2.4 | 36 | 52 |
| | | 2 | 14.2 | 55.0 | 970 | 170 | 13 | 0.3 | 2.0 | --- | --- | 14 | 30 |

Use our calculation tools on our website to easily calculate heat outputs and other technical data with just a few clicks!

► <https://www.kampmanngroup.com/hvac/products/unit-heaters/tip#Calculate-performance-data>

¹⁾ at LPHW 75/65 °C, $t_{\text{r}} = 20$ °C


²⁾ The sound pressure levels were calculated with an assumed room insulation of 16 dB(A). This corresponds to a distance of 5 m, a room volume of 3000 m³ and a reverberation time of 2.0 s (in accordance with VDI 2081).

TIP

Heat exchanger Copper/aluminium Model size 7

EC fan, 230 V, reduced speed

Technical drawing (Dimensions in mm)

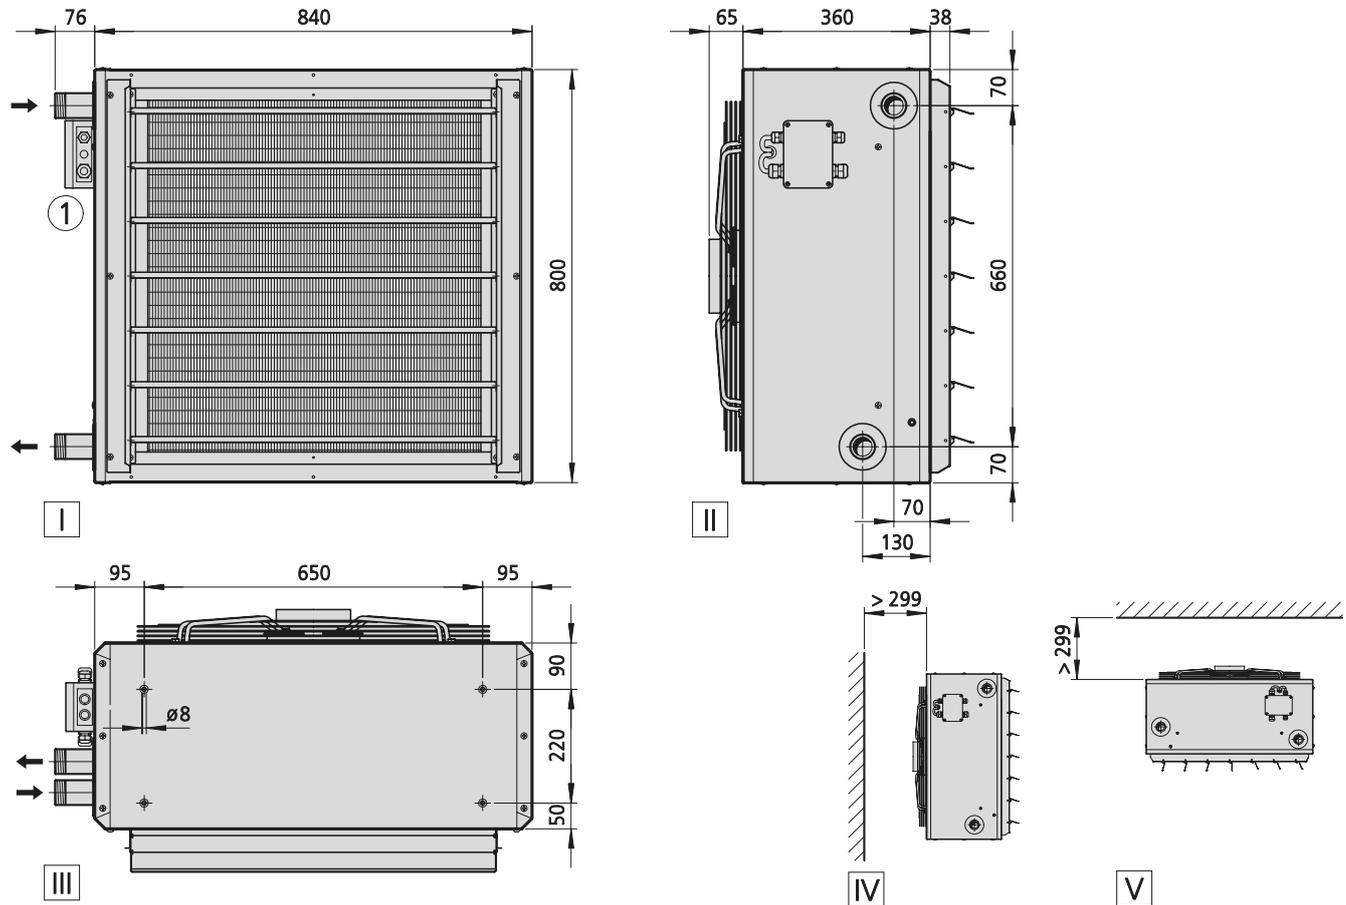

- View**
- I Front view
 - II Side view
 - III Top view
 - IV wall-mounted
 - V ceiling-mounted

More information

① Electrical connection for EC model, electromechanical

Specifications

| Type | Weight [kg] | Water content [l] | Connection |
|--------|-------------|-------------------|------------|
| 572056 | 58 | 4.8 | 1 1/2" |
| 573056 | 62 | 6.2 | 1 1/2" |
| 574056 | 64 | 7.6 | 1 1/2" |

Performance data

| Type | Inlet air temperature | Control voltage | Heat output ¹⁾ | Outlet air temperature | Air flow | Nominal fan speed | Power consumption | Amperage | Throw (wall-mounted) | Maximum installation height when ceiling-mounted | | Sound pressure level ²⁾ | Sound power level | |
|--------|-----------------------|-----------------|---------------------------|------------------------|---------------------|-------------------|-------------------|----------|----------------------|--|--------------|------------------------------------|-------------------|----|
| | | | | | | | | | | Louvre | Air diffuser | | | |
| | [°C] | [V] | [kW] | [°C] | [m ³ /h] | [1/min] | [W] | [A] | [m] | [m] | [m] | [dB(A)] | [dB(A)] | |
| 572056 | 20 | 10 | 37.0 | 34.3 | 7820 | 780 | 340 | 1.5 | 32.0 | 7.5 | 4.2 | 59 | 75 | |
| | | 8 | 31.9 | 35.4 | 6240 | 630 | 170 | 0.8 | 25.0 | 6.6 | 3.8 | 54 | 70 | |
| | | 6 | 25.9 | 37.6 | 4440 | 460 | 71 | 71 | 0.3 | 17.0 | 5.4 | 3.2 | 45 | 61 |
| | | 4 | 19.7 | 42.2 | 2680 | 295 | 24 | 24 | 0.1 | 10.0 | 4.0 | 2.4 | 33 | 49 |
| | | 2 | 14.0 | 43.7 | 1110 | 145 | 9 | 9 | 0.1 | 3.0 | 2.4 | --- | 14 | 30 |
| 573056 | 20 | 10 | 44.0 | 40.0 | 6630 | 780 | 340 | 1.5 | 27.0 | 6.8 | 3.9 | 57 | 73 | |
| | | 8 | 37.5 | 41.5 | 5260 | 630 | 170 | 0.8 | 21.0 | 6.0 | 3.4 | 52 | 68 | |
| | | 6 | 29.7 | 44.2 | 3700 | 460 | 71 | 71 | 0.3 | 14.0 | 4.9 | 2.9 | 43 | 59 |
| | | 4 | 21.8 | 50.2 | 2170 | 295 | 24 | 24 | 0.1 | 7.0 | 3.6 | --- | 31 | 47 |
| | | 2 | 14.3 | 52.2 | 810 | 145 | 9 | 9 | 0.1 | 1.0 | --- | --- | 12 | 28 |
| 574056 | 20 | 10 | 55.8 | 49.5 | 5690 | 780 | 340 | 1.5 | 23.0 | 6.2 | 3.6 | 55 | 71 | |
| | | 8 | 45.7 | 50.7 | 4490 | 630 | 170 | 0.8 | 17.0 | 5.4 | 3.2 | 50 | 66 | |
| | | 6 | 33.8 | 52.7 | 3120 | 460 | 71 | 71 | 0.3 | 11.0 | 4.4 | 2.6 | 41 | 57 |
| | | 4 | 21.8 | 56.7 | 1790 | 295 | 24 | 24 | 0.1 | 6.0 | 3.2 | --- | 29 | 45 |
| | | 2 | 10.6 | 58.2 | 590 | 145 | 9 | 9 | 0.1 | --- | --- | --- | 10 | 26 |

Use our calculation tools on our website to easily calculate heat outputs and other technical data with just a few clicks!

► <https://www.kampmanngroup.com/hvac/products/unit-heaters/tip#Calculate-performance-data>

¹⁾ at LPHW 75/65 °C, $t_{\text{r}} = 20$ °C

²⁾ The sound pressure levels were calculated with an assumed room insulation of 16 dB(A). This corresponds to a distance of 5 m, a room volume of 3000 m³ and a reverberation time of 2.0 s (in accordance with VDI 2081).

03 ▶ Design information



Information on planning and design

The selection and configuration of TIP unit heaters depends on more than just the heat load calculated. The required air circulation, structural and acoustic conditions and unit-specific properties need to be taken into consideration, among other things.

Water resistance

Please use our online calculation programs to determine the water resistance:

- ▶ Kampmann.de/tip

The water resistance is formed from:

- ▶ the heat output Q_{eff}
- ▶ the heating medium temperature difference

$$\Delta t_w = t_{w1} - t_{w2}$$

- ▶ the heating medium volumetric flow

$$m = \frac{Q_{\text{eff}}}{\Delta t_w} \times 0.86$$

Noise

There is minimal noise from these units due to the aerodynamic design of the whisper-quiet sickle-blade fan. Flow noise is reduced because of the sickle-shaped design of the profiled blades combined with the optimised inlet nozzle.

The uniform spread over the entire frequency range, minimising blade passing noise, reduces unpleasant peaks of noise. Nonetheless, take into account the permissible noise levels when designing unit heaters.

Sound pressure level

The A-rated sound pressure levels given in the technical data (pages 14 to 27) have been calculated with an assumed room insulation of 16 dB(A). This corresponds to a clearance of 5 m, a room volume of 3000 m³ and a reverberation time of 2.0 s (in accordance with VDI 2081). The actual sound pressure level may differ significantly from the stated figures, depending on the room geometry, absorption capacity of the space, equipment, accessories etc.

Sound power level

The sound power level describes the noise emission from the units, independently of the space and distance. The sound pressure levels can be calculated when the room geometry and absorption values are known. The sound power levels have been determined using the enveloping surface process according to DIN 45635-56.

04 ▶ Control



Control of TIP – electromechanical model

Product features

The EC fans used can be continuously variably controlled by a 0-10 V DC signal.

The “intelligent” motor electronics detects any possible motor fault and automatically switches off the fan. This fault can be externally evaluated. The entire group or individual units are shut down in the event of a motor fault, depending on the control version. The speed can be limited to approx. 50 % of the maximum speed by the potentiometer in the junction box. Actuation by Modbus-RTU instead of by a 0-10 V DC signal is possible depending on the type of unit heater.

Control units

Four different control units are available for operation and control.

Speed controller, type 30510

Continuously variable speed controller for use in conjunction with a thermostat for room temperature-dependent two-point control of heating or cooling units in closed rooms. The fan speed is set manually on the speed controller at between 0-100 %. The thermostats activate the ventilation units at the pre-set speed depending on the temperature. It is possible to automatically switch between day and night mode using timer program solutions (type 30056; type 30076).

Room thermostat, type 30155

The EC recirculating air control unit type 30155 enables the operation and temperature control of heating/cooling recirculating air units in 2- or 4-pipe mode. The room temperature can be set using a rotary dial. The temperature is controlled by a fan and valve. In principle, the ventilation unit is switched on and off depending on the temperature and, at the same time, the valve is opened/closed. The fan can be operated manually at 3 stages or continuously variably in Automatic mode. The control unit is also equipped with a frost protection function.

Clock thermostat, type 30256

The EC recirculating air control unit type 30256 enables the operation and temperature control of heating/cooling recirculating air units in 2- or 4-pipe mode. The room temperature can be set using the functional keys. The temperature is controlled by a fan and valve. In principle, the ventilation unit is switched on and off depending on the temperature and, at the same time, the valve is opened/closed. The fan can be controlled at 10 stages, both in Automatic mode as well as in Manual mode. The control is also equipped with an automatic summer/winter changeover and a frost protection function. The built-in timer program also enables day or week programs to be set.

Electronic speed controller, type 30515

The continuously variable electronic compact controller is designed for the operation of up to 10 recirculating air units (2-pipe heating/cooling) with EC fans to heat or cool rooms. The controller has a temperature control, which works with a fan and shut-off valve. The temperature setpoint can be set for day and night mode. A digital timer, including day, night and week program, is also included. The room sensor supplied is installed separately. A mean value can optionally be formed using 2 or 4 room sensors. Apart from continuously variable speed control, the fan speed can also be manually set. In addition, the control has a frost protection function, an external enable switch and a potential-free operating and collective fault alert, among other things. If required, the fan can also be used for pure air circulation without heating or cooling.

Cabling

The following points need to be taken into account with the cabling and wiring diagrams below:

- ▶ Comply with the details on the type of cable and cabling, taking into consideration VDE 0100.
- ▶ Without *: NYM-J. The requisite number of wires, including protective conductor, is stated on the cable. Cross-sections are not stated, as the cable length is involved in the calculation of the cross-section.
- ▶ With *: J-Y(ST)Y 0.8 mm, max. 100 m between the speed controller and the last unit heater; provide a shield on one side when longer than 20 m. Lay separately from power lines.
- ▶ With **: Sensor line 1.5 mm², e.g. J-Y(ST)Y, 4 x 2 x 0.8 mm, max. 100 m, lay separately from power lines.
- ▶ With ***: J-Y(ST)Y, 0.8 mm, max. 50 m, lay separately from power lines.
- ▶ With ****: J-Y(ST)Y, 0.8 mm, max. 100 m. Lay separately from power lines.
- ▶ If other types of cables are used, they must be at least equivalent.
- ▶ The terminals on the unit are suitable for a maximum wire cross-section of 2.5 mm², the mains plug for max. 4.0 mm².
- ▶ Any RCCBs used must be pulsating current-sensitive (type A). When the power supply to the unit is switched on, pulsating charging currents from the capacitors in the integral EMC filter can cause residual current protection devices to trip. We recommend the use of RCCBs with a tripping threshold of 300 mA.
- ▶ The electrical data listed in the following table needs to be considered when configuring the mains supply and fuses on site.

Maximum connectible unit heaters with EC fan per speed control unit


| Speed control unit | | | |
|--------------------|------------|------------|------------|
| Type 30510 | Type 30155 | Type 30256 | Type 30515 |
| [Number] | [Number] | [Number] | [Number] |
| 10 | 2 | 2 | 10 |

Electrical data for TIP, electromechanical model


| Unit heater type | Nominal voltage [V] | Mains frequency [Hz] | Active power [kW] | Nominal current [A] | Leakage current [mA] | Max. fuse [A] | IP protection rating | Protection class |
|------------------|---------------------|----------------------|-------------------|---------------------|----------------------|---------------|----------------------|------------------|
| 54xx56 | 230 | 50/60 | 0.14 | 1.27 | < 3.5 | B10 | 54 | I |
| 54xx58 | 230 | 50/60 | 0.17 | 1.46 | < 3.5 | B10 | 54 | I |
| 55xx56 | 230 | 50/60 | 0.17 | 1.51 | < 3.5 | B10 | 54 | I |
| 55xx58 | 230 | 50/60 | 0.39 | 1.74 | < 3.5 | C16 | 54 | I |
| 56xx58 | 230 | 50/60 | 0.46 | 2.13 | < 3.5 | C16 | 54 | I |
| 57xx56 | 230 | 50/60 | 0.37 | 1.69 | < 3.5 | C16 | 54 | I |
| 57xx58 | 230 | 50/60 | 0.85 | 3.83 | < 3.5 | C16 | 54 | I |

xx Heat exchanger model


Cabling of TIP (00), actuation by speed controller type 30510**

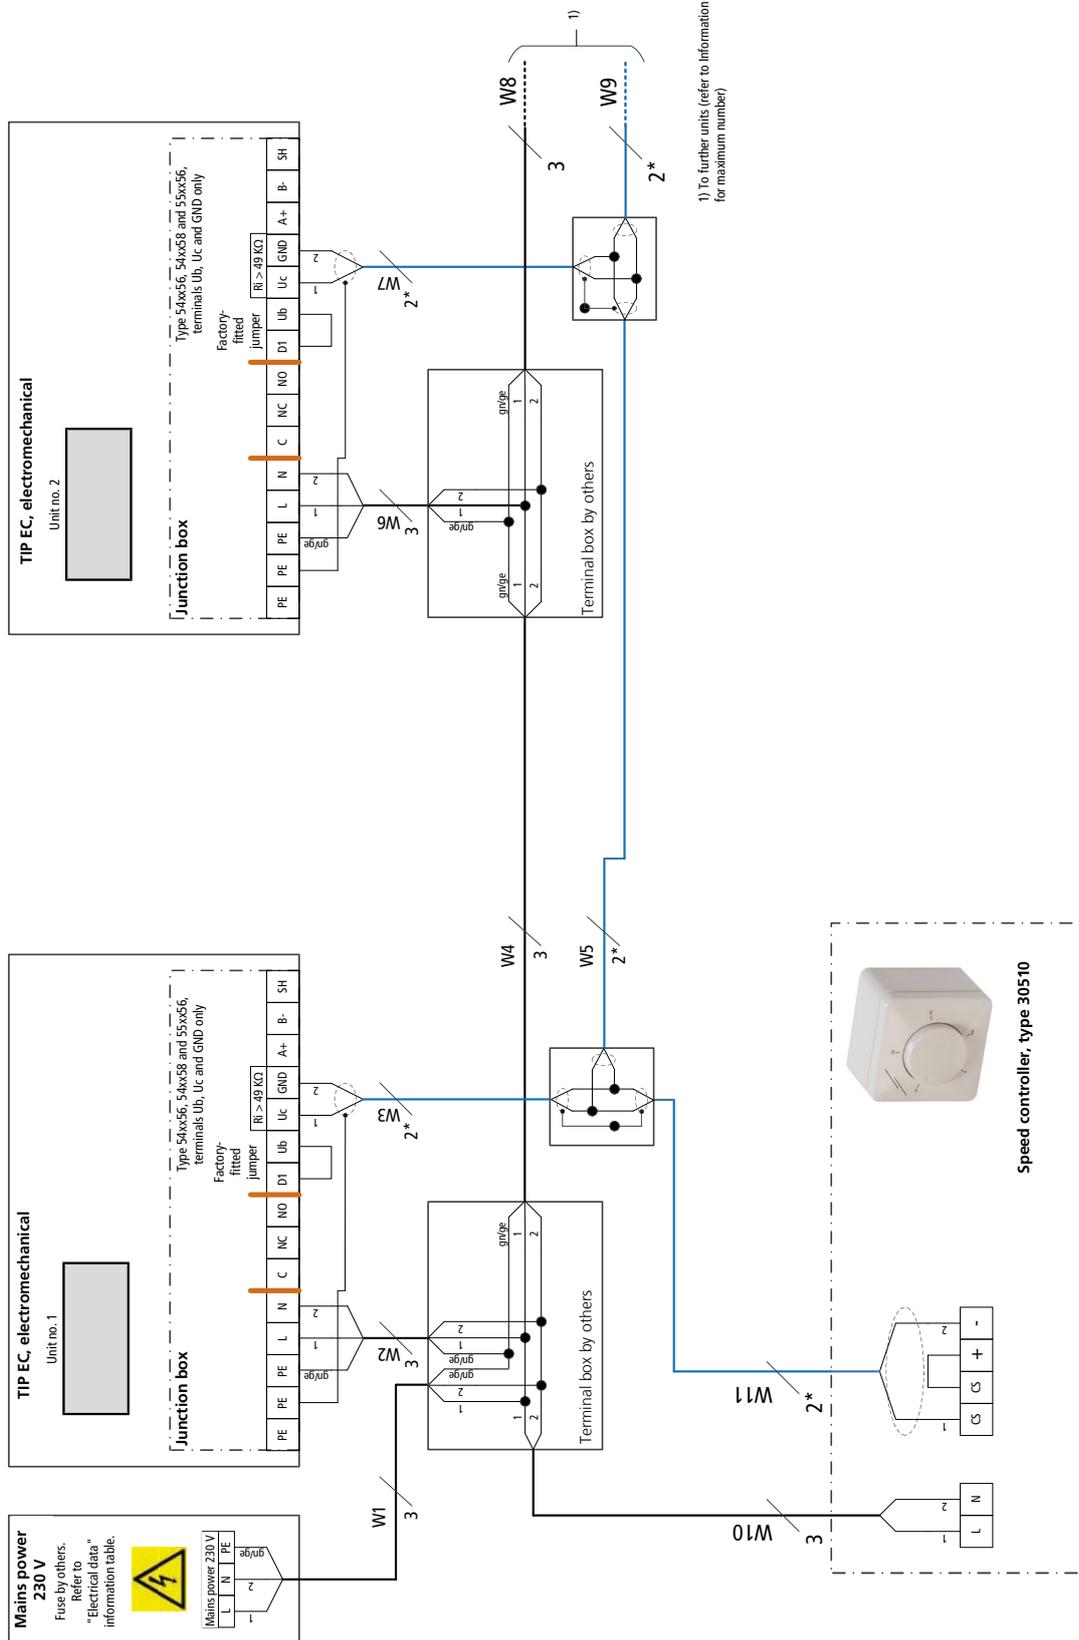

Cabling of TIP (00), actuation by speed controller type 30510 with industrial thermostat type 30058/30059**

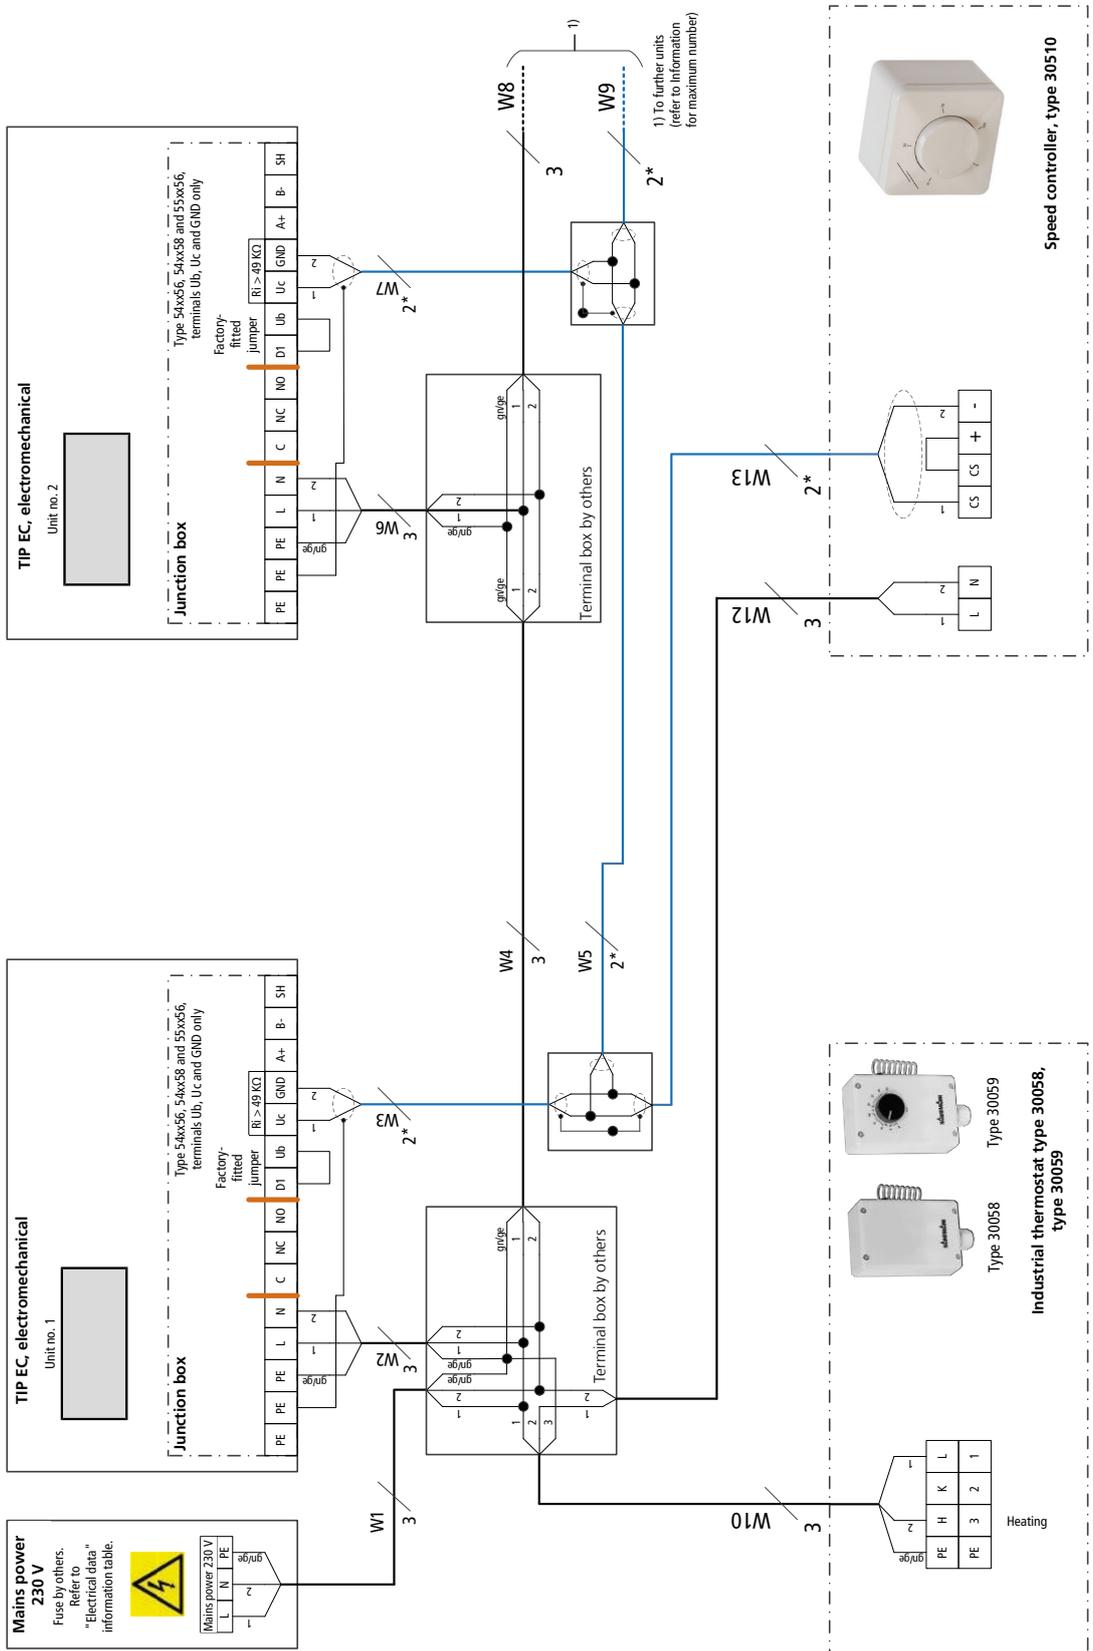

Cabling of TIP (00), actuation by speed controller type 30510 with room thermostat type 30055**

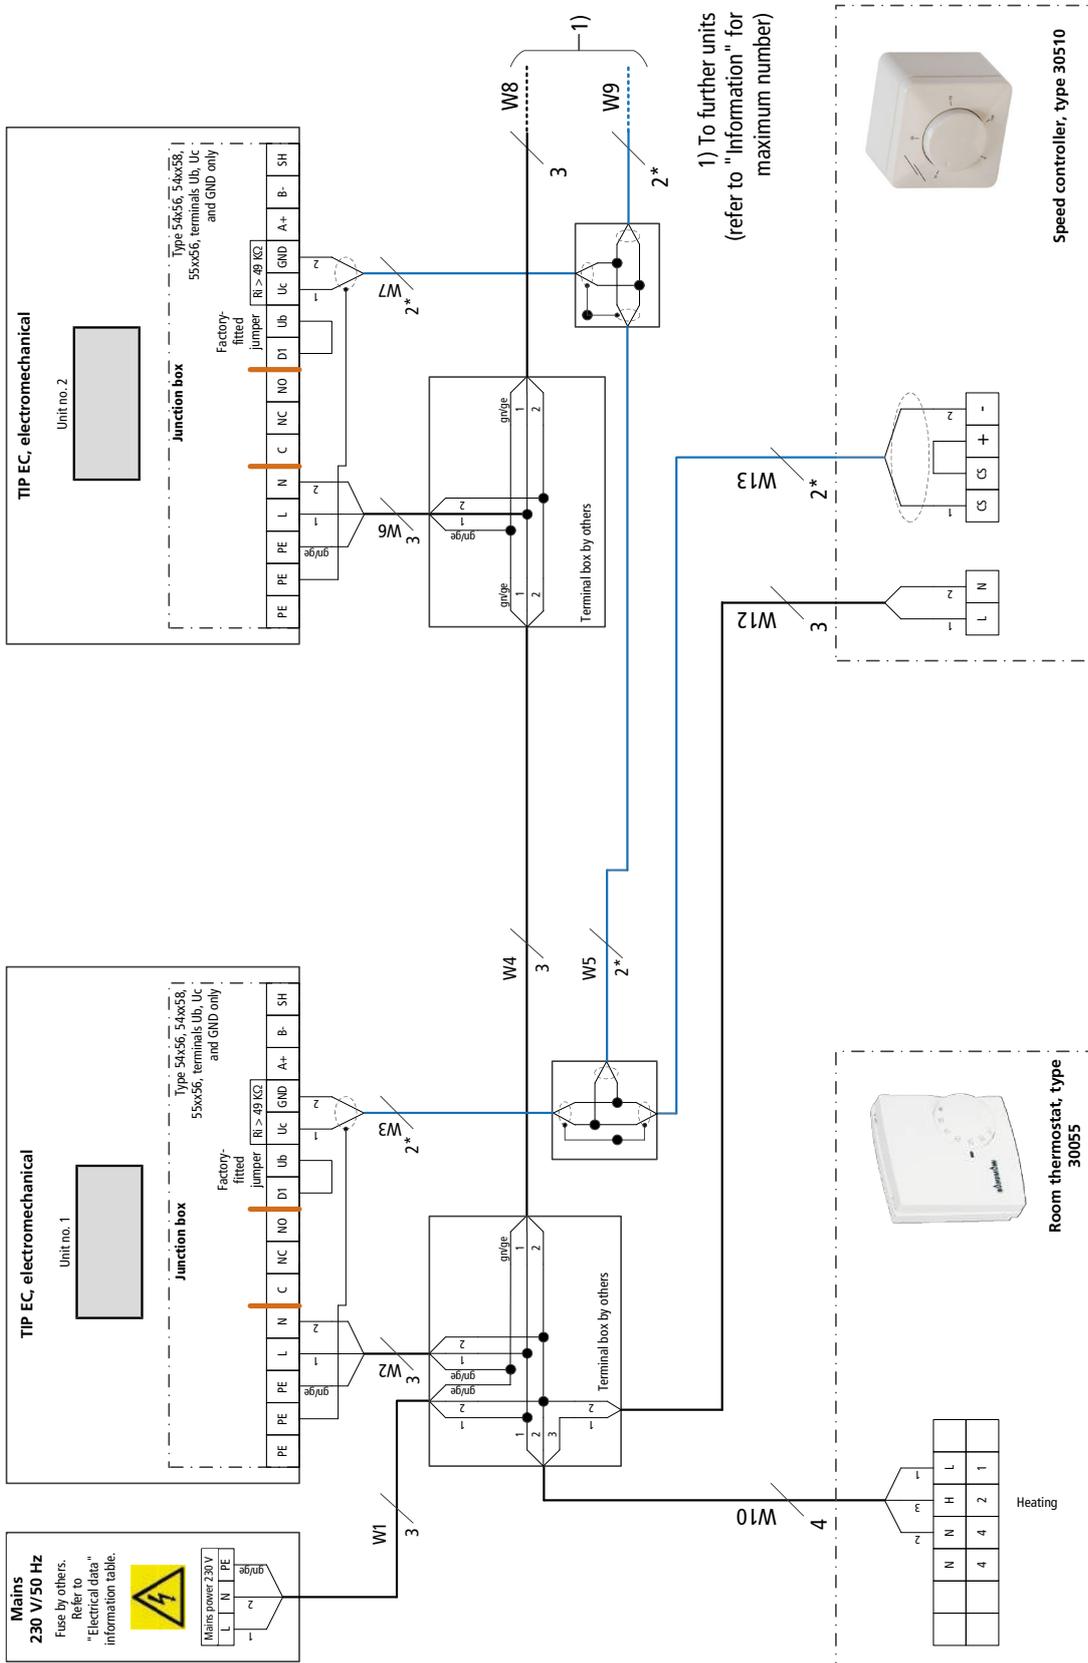

Speed controller, type 30510




Room thermostat, type 30055


| | | | | | |
|---|---|---|---|---|---|
| 1 | | | | | |
| 2 | N | N | H | L | 1 |
| 3 | | | | | |
| 4 | N | N | H | L | 1 |

Heating


Cabling of TIP(**00), actuation by speed controller type 30510 with clock thermostat type 30056

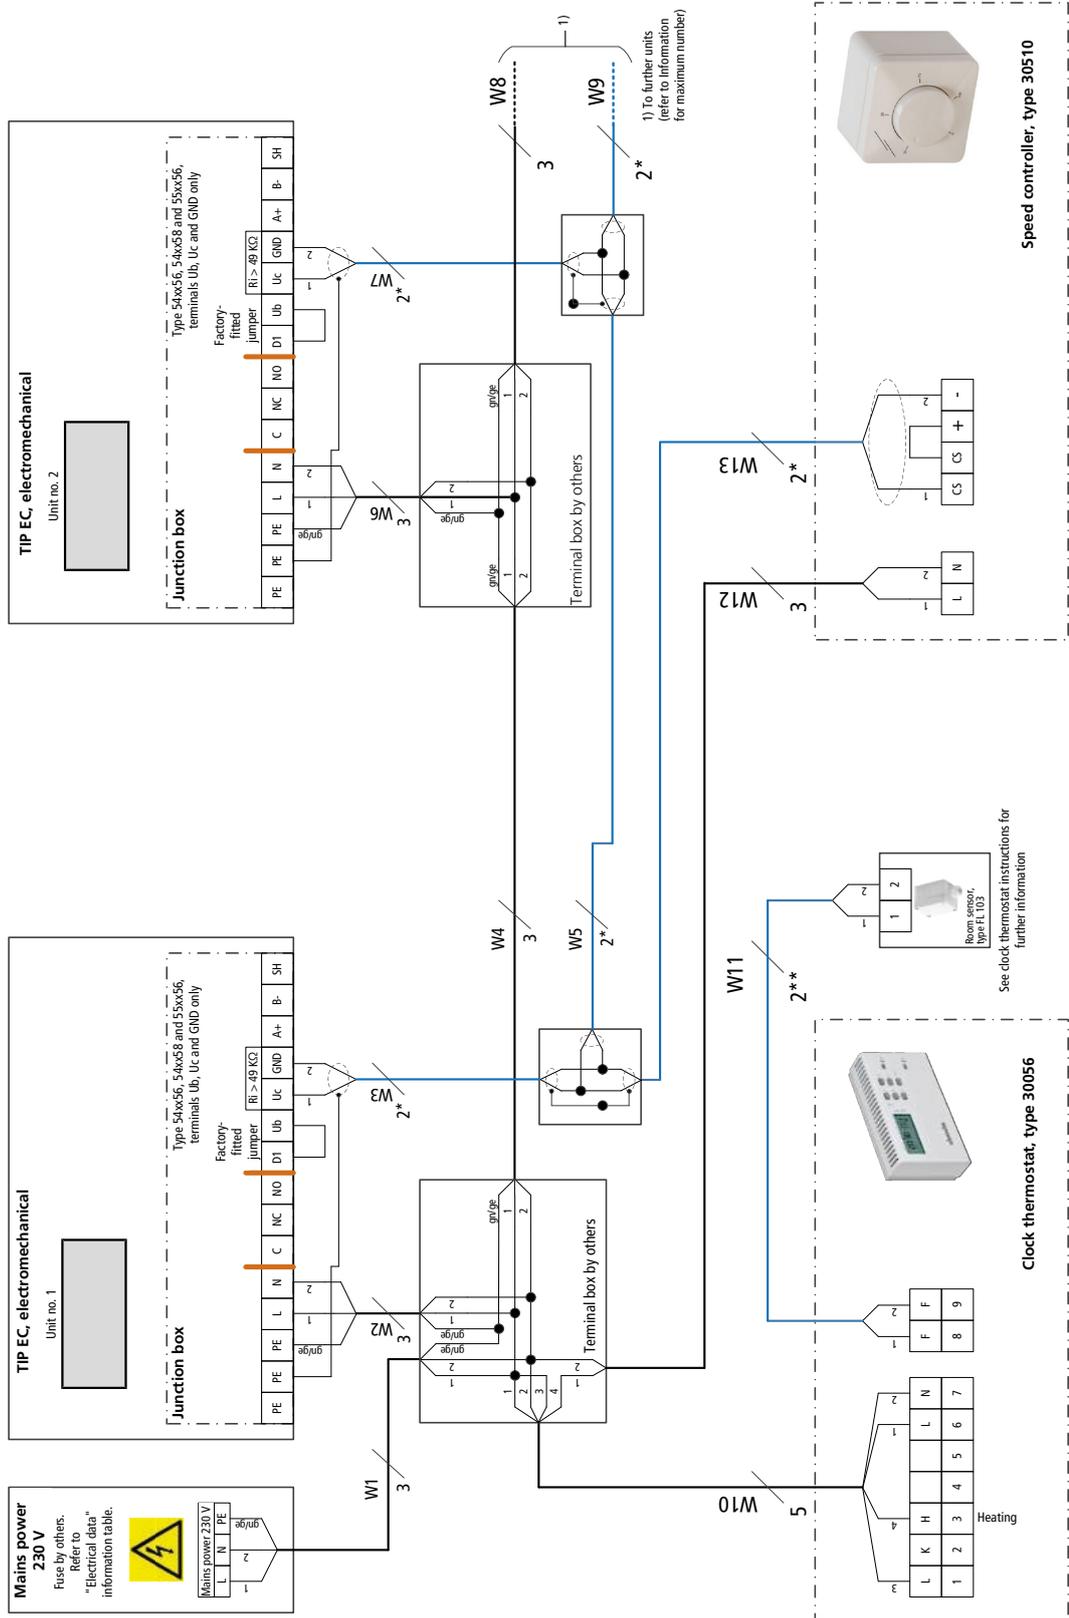


Cabling of TIP (00), actuation by Klimaregler type 30155, 2-pipe valve actuator 230 V AC, Open/Close**

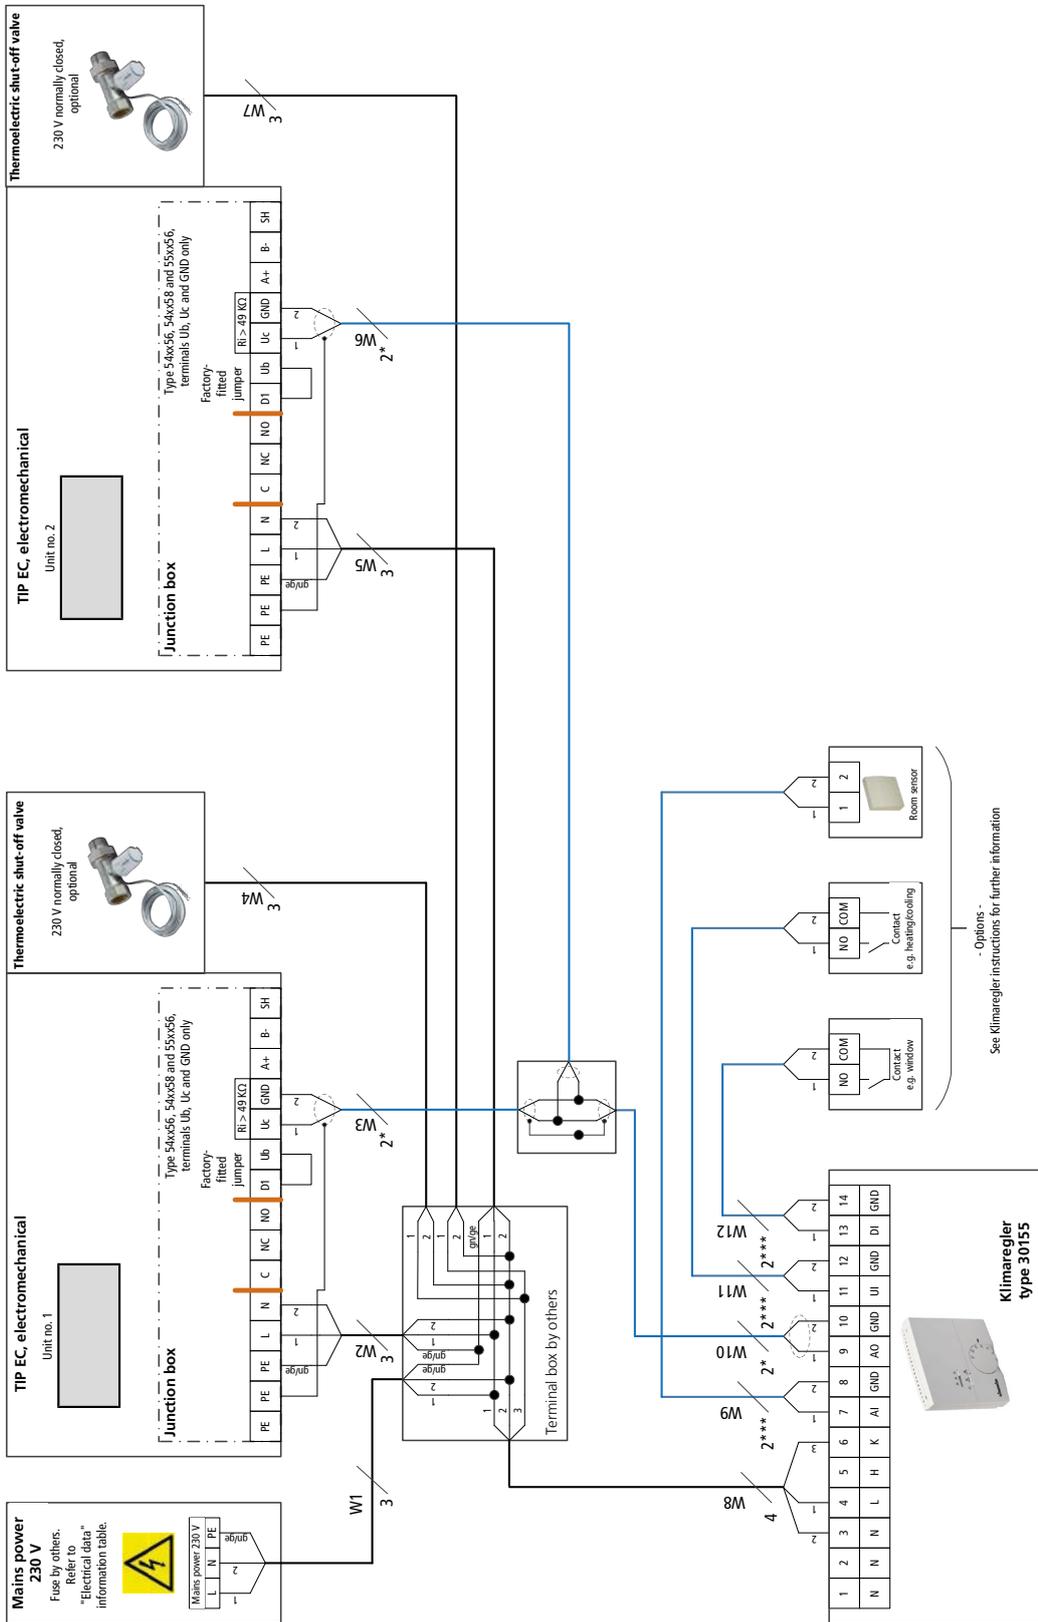


Cabling of TIP (**00), actuation by Klimaregler type 30256, 2-pipe valve actuator 230 V AC, Open/Close

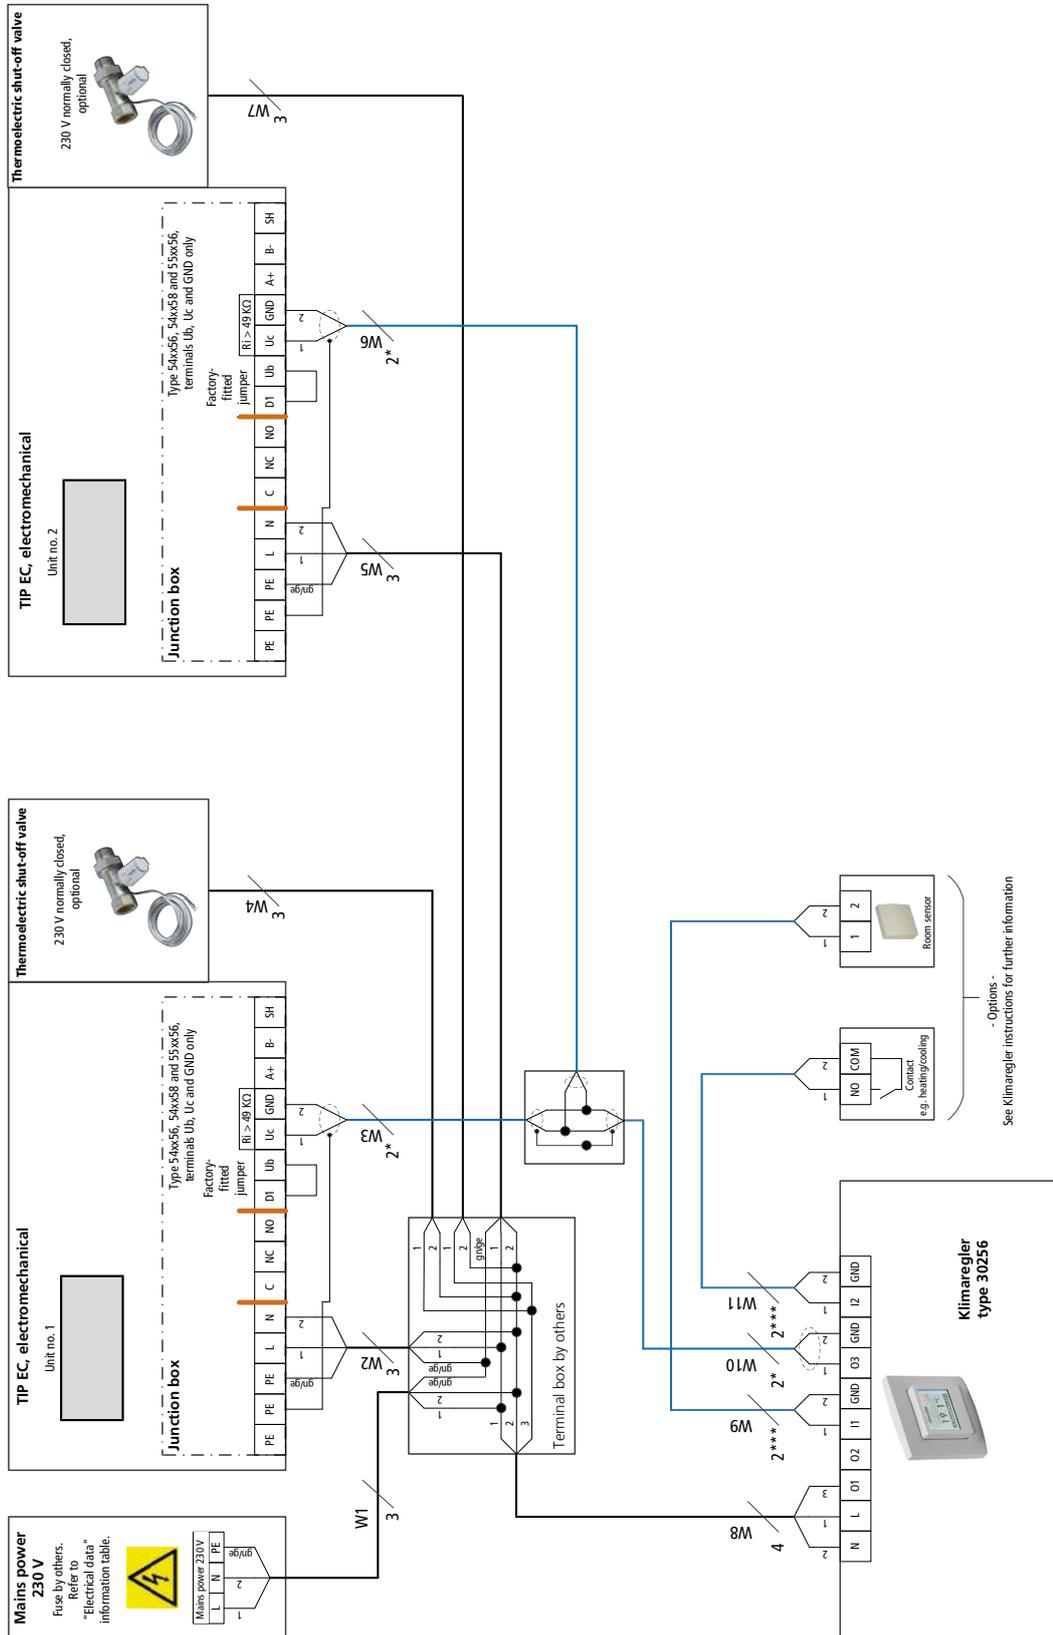

Cabling of TIP (*00), actuation by speed controller type 30515

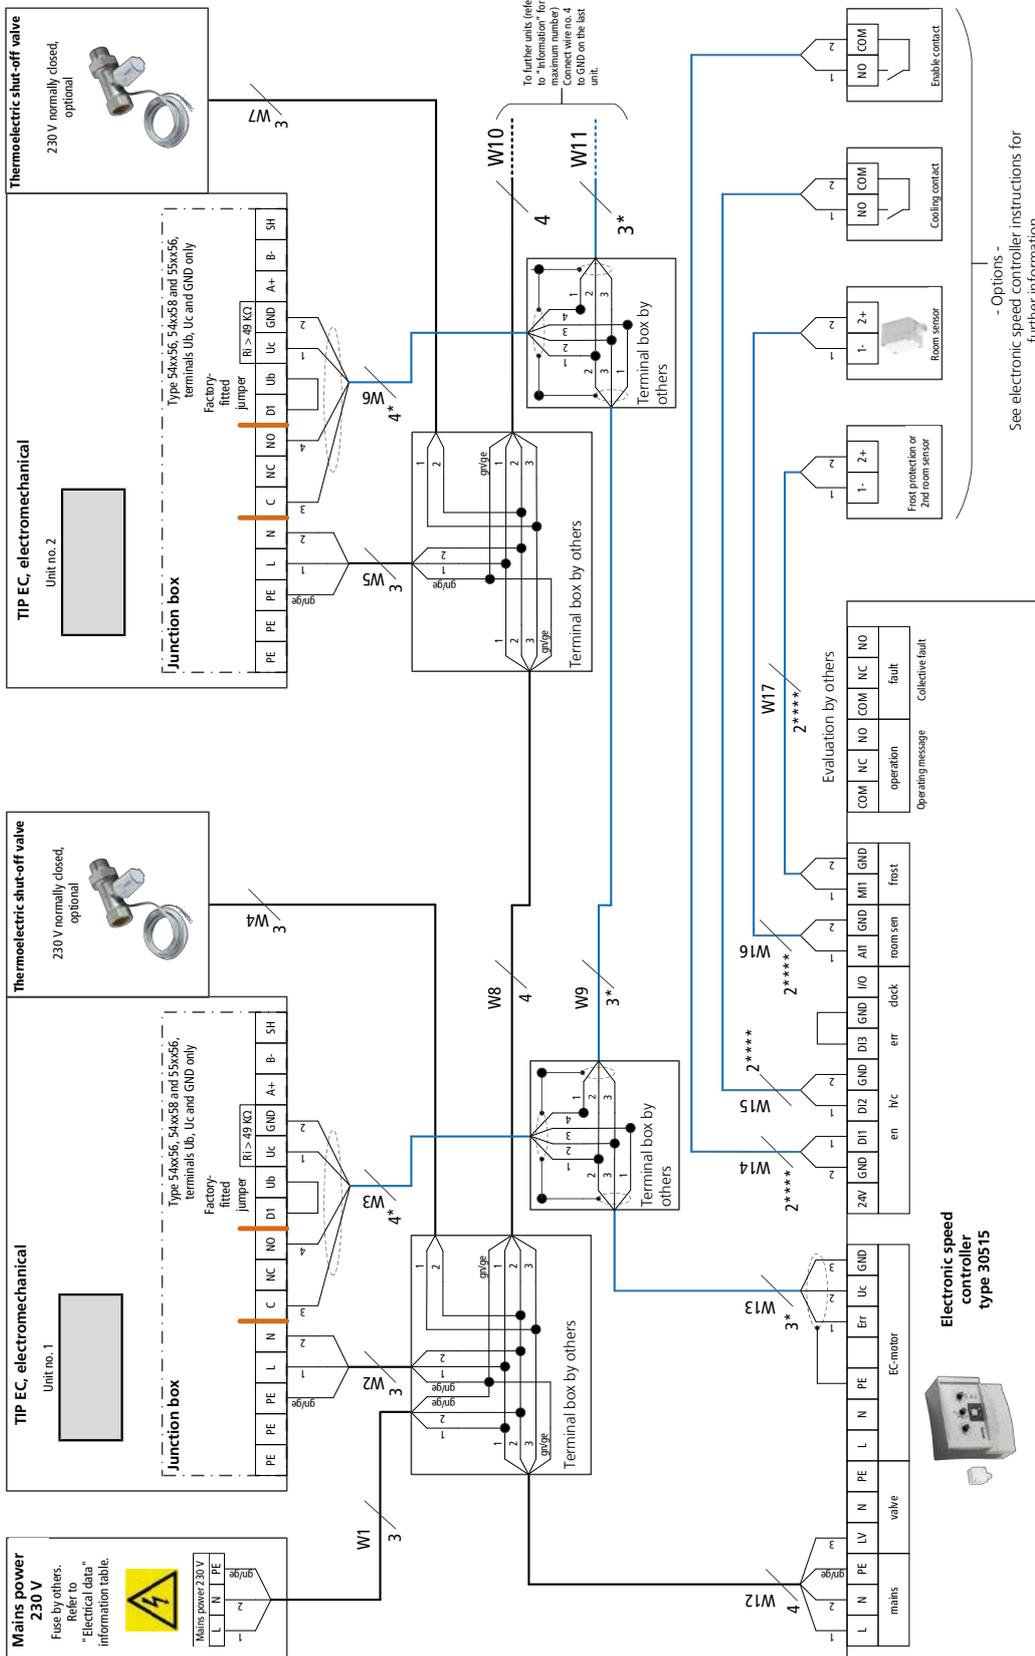

Cabling of TIP (**00), actuation by DDC/BMS, 2-pipe valve actuator 230 V AC, Open/Close

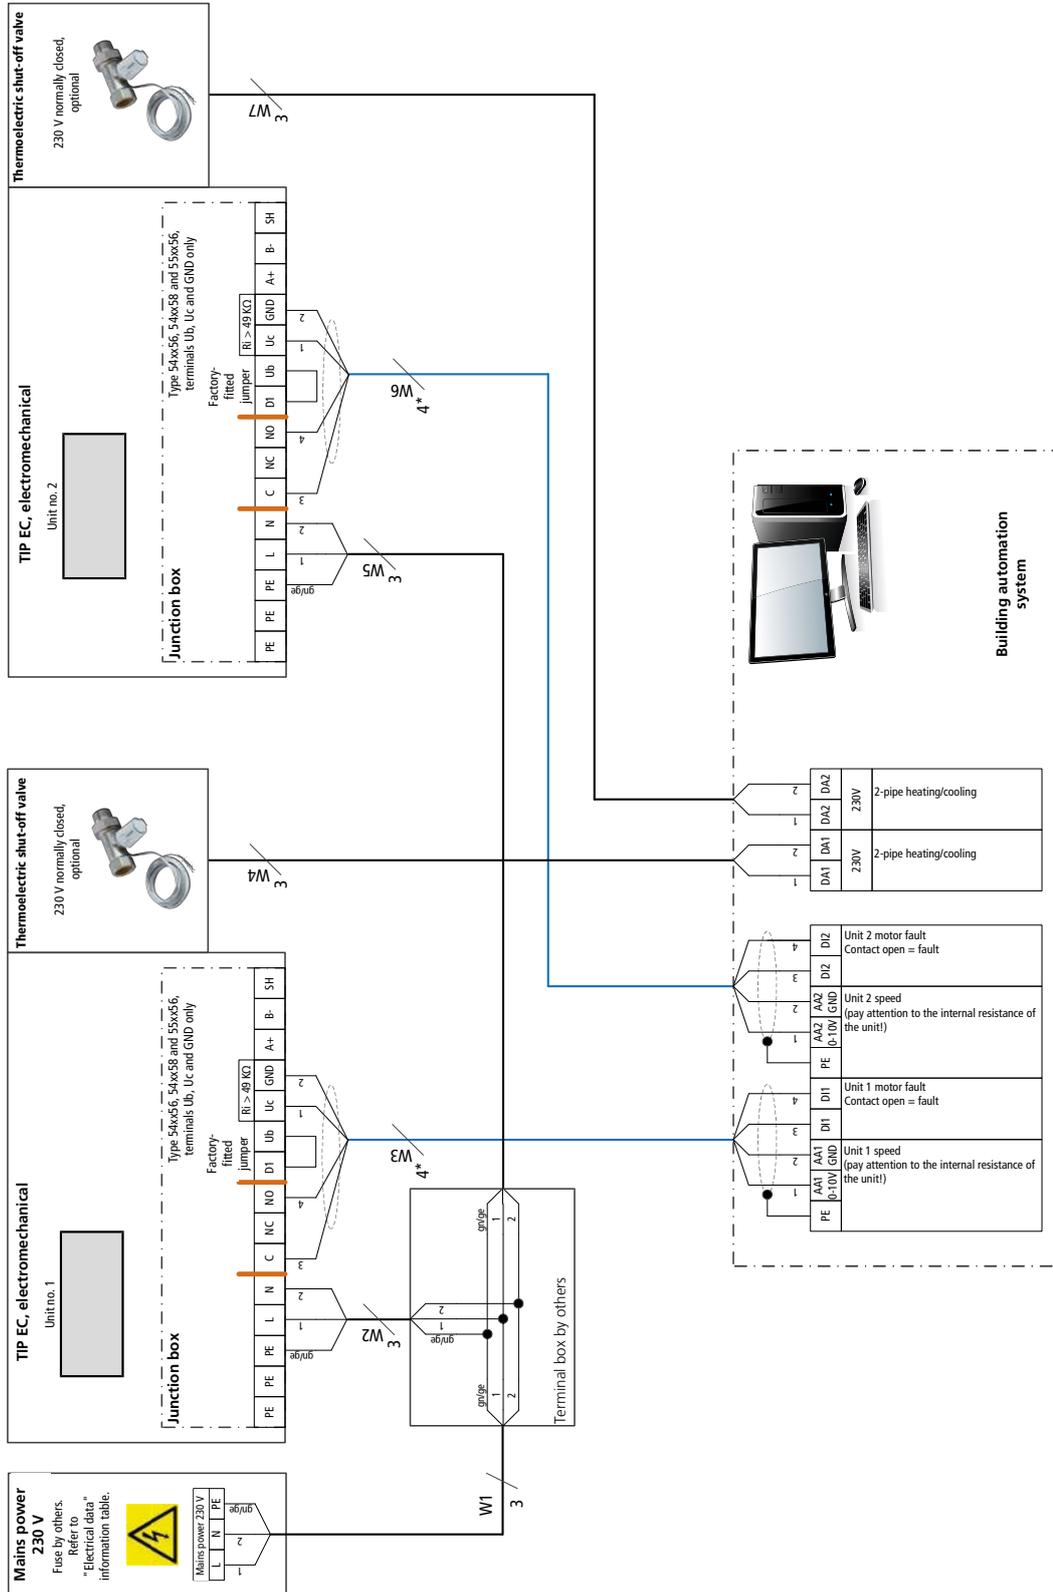

05 ▶ Ordering information

TIP

| Fan version | Model size | Length | Width | Height | Nominal fan speed | Heat exchanger performance | Article no. |
|-------------|------------|--------|-------|--------|-------------------|----------------------------|-------------|
| | | [mm] | [mm] | [mm] | [1/min] | | |

Heat exchanger model Copper/aluminium

| | | | | | | | |
|------------------------------|---|-----|-----|-----|------------|------------------------------------|--------------|
| EC fan, 230 V, high speed | 4 | 320 | 540 | 500 | 525 – 1520 | Low, heat exchanger code no. 20 | 157000542058 |
| | | | | | | Medium, heat exchanger code no. 30 | 157000543058 |
| | | | | | | High, heat exchanger code no. 40 | 157000544058 |
| | 5 | 320 | 640 | 600 | 235 – 1470 | Low, heat exchanger code no. 20 | 157000552058 |
| | | | | | | Medium, heat exchanger code no. 30 | 157000553058 |
| | | | | | | High, heat exchanger code no. 40 | 157000554058 |
| | 6 | 320 | 740 | 700 | 160 – 990 | Low, heat exchanger code no. 20 | 157000562058 |
| | | | | | | Medium, heat exchanger code no. 30 | 157000563058 |
| | | | | | | High, heat exchanger code no. 40 | 157000564058 |
| | 7 | 360 | 840 | 800 | 170 – 1000 | Low, heat exchanger code no. 20 | 157000572058 |
| | | | | | | Medium, heat exchanger code no. 30 | 157000573058 |
| | | | | | | High, heat exchanger code no. 40 | 157000574058 |
| EC fan, 230 V, reduced speed | 4 | 320 | 540 | 500 | 480 – 1410 | Low, heat exchanger code no. 20 | 157000542056 |
| | | | | | | Medium, heat exchanger code no. 30 | 157000543056 |
| | | | | | | High, heat exchanger code no. 40 | 157000544056 |
| | 5 | 320 | 640 | 600 | 380 – 1080 | Low, heat exchanger code no. 20 | 157000552056 |
| | | | | | | Medium, heat exchanger code no. 30 | 157000553056 |
| | | | | | | High, heat exchanger code no. 40 | 157000554056 |
| | 7 | 360 | 840 | 800 | 145 – 780 | Low, heat exchanger code no. 20 | 157000572056 |
| | | | | | | Medium, heat exchanger code no. 30 | 157000573056 |
| | | | | | | High, heat exchanger code no. 40 | 157000574056 |

Accessories

| Article | Article | Properties | Dimensions [mm] | Suitable for | Article no. |
|---|-----------------------------|---|--------------------|--|---------------------|
| Control accessories electro-mechanical 230 V | | | | | |
|  | Room thermostat | Surface-mounted, 3-stage. Only in conjunction with valves/valve kits with 230 V actuator Open/Close. 230 V, EC, heating/cooling in a 2 and 4-pipe, with OFF/Manual/Automatic fan changeover | 110 x 111 x 26 | EC units electro-mechanical 5 no. Katherm HK trench heaters 2 TOP or Ultra unit heaters 2 Venkons, KaCool D AF or KaCool W fan coils | 196000030155 |
|  | Clock thermostat | Flush-mounted, continuously variable, with LCD operating menu and integrated timer program 230 V, EC, heating/cooling for 2- and 4-pipe | 85 x 46 x 81 | EC units electromechanical 2 units | 196000030256 |
|  | Speed controller | Continuously variable fan operation, 0-100% presettable 230 V, EC, On/Off via room thermostat, DC 0-10 V, surface-mounted, protection class IP 54, flush-mounted, protection class IP 44 | 82 x 82 x 68 | EC units electromechanical 2 ProtecTor, 5 UniLine or Tandem air curtains 10 TOP or Ultra unit heaters 10 Venkons, 2 KaCool D AF or KaCool W fan coils | 196000030510 |
|  | Electronic speed controller | With integrated digital timer, degree of protection IP 40 230 V, EC, with day, night, week programme, continuously variable fan operation 0 to 100 %, optionally manual or automatic, 0-10 VDC, recirculating air, including sensor | 262 x 277 x 153 | EC units electromechanical 10 TOP, TIP or Ultra unit heaters 10 Venkon fan coils 2 KaCool D AF or KaCool W fan coils | 196000030515 |

CONTINUED ▶

Accessories

| Article | Article | Properties | Dimensions [mm] | Suitable for | Article no. |
|---------|---------|------------|--------------------|--------------|-------------|
|---------|---------|------------|--------------------|--------------|-------------|

Thermostats

| | | | | | |
|---|-----------------------|--|----------------|--|---------------------|
|  | Room thermostat | with thermal feedback, 230 V AC, surface-mounted Protection class IP 30 | 78 x 28 x 83 | all unit heaters and Galaxis radiant ceiling panels | 196000030055 |
|  | Industrial thermostat | with setpoint adjustment by tool Protection class IP 54 | 113 x 71 x 158 | all unit heaters, ProtecTor air curtains und Galaxis radiant ceiling panels | 196000030058 |
|  | Industrial thermostat | with setpoint adjustment using a dial Protection class IP 54 | 113 x 71 x 158 | all unit heaters, ProtecTor air curtains und Galaxis radiant ceiling panels | 196000030059 |
|  | Clock thermostat | with integral digital timer with day/night/week pro- gramme, with night setback, protection class IP 20 | 84 x 33 x 133 | all unit heaters and Galaxis radiant ceiling panels | 196000030056 |

Valves

| | | | | | |
|---|----------------------------------|--------------------------------|----------------|------------------|---------------------|
|  | Thermoelectric shut-off valve | 1" connection, 230 V AC | 200 x 50 x 300 | all unit heaters | 196000030911 |
|  | Thermoelectric shut-off valve | 1 1/4" connection, 230 V AC | 200 x 50 x 300 | all unit heaters | 196000030912 |
|  | Thermoelectric shut-off valve | 1 1/2" connection, 230 V AC | 200 x 50 x 300 | all unit heaters | 196000030913 |

CONTINUED ▶


Accessories

| Article | Article | Properties | Dimensions | Suitable for | Article no. |
|---------|---------|------------|------------|--------------|-------------|
| | | | [mm] | | |




Repair switch

| | | | | | |
|---|---------------|---|---------------|---|---------------------|
|  | Repair switch | EC, supplied loose, degree of protection IP 65, max switching current 25 A Enables individual units in a switching group to be decommissioned by voltage disconnection. The thermal contacts are bridged in advance, and subsequently opened on the motor side so that the other units in the group can continue to operate without interruption. | 82 x 127 x 82 | all unit heaters, air curtains 230 V with EC-motors | 198000030160 |
|---|---------------|---|---------------|---|---------------------|

Air outlets

| | | | | | |
|---|----------|---|-----------------|--------------|---------------------|
|  | Louvre | two-row for wall- and ceiling-mounted units | 495 x 35 x 495 | Model size 4 | 198000034002 |
| | | | 595 x 35 x 595 | Model size 5 | 198000035002 |
| | | | 695 x 35 x 695 | Model size 6 | 198000036002 |
| | | | 795 x 35 x 795 | Model size 7 | 198000037002 |
|  | Diffuser | in four directions, for ceiling-mounted units | 500 x 195 x 500 | Model size 4 | 198000034004 |
| | | | 600 x 195 x 600 | Model size 5 | 198000035004 |
| | | | 700 x 195 x 700 | Model size 6 | 198000036004 |
| | | | 800 x 195 x 800 | Model size 7 | 198000037004 |

Brackets
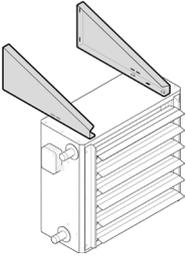
| | | | | | |
|---|----------------------------|---|-----------------|---------------|---------------------|
|  | Universal 4-point brackets | recirculating air only made of sendzimir galvanized steel, for use as a 4-point fixing for ceiling installation | 172 x 498 x 165 | Models 4 to 7 | 198000030042 |
|  | Wall brackets | recirculating air only made of sendzimir galvanized steel for wall mounting | 251 x 50 x 585 | Model size 4 | 198000034044 |
| | | | | Model size 5 | 198000035044 |
| | | | 268 x 50 x 635 | Model size 6 | 198000036044 |
| | | | 286 x 50 x 685 | Model size 7 | 198000037044 |
|  | Ceiling-wall brackets | | 420 x 100 x 510 | Model 4 | 198000034049 |
| | | | 420 x 100 x 610 | Model 5 | 198000035049 |
| | | | 470 x 100 x 710 | Model 6 | 198000036049 |
| | | | 470 x 100 x 810 | Model 7 | 198000037049 |

Kampmanngroup.com/tip

Subject to technical changes. 407/06.2020 EN

Kampmann GmbH
Friedrich-Ebert-Str. 128 - 130
49811 Lingen (Ems)
Germany

T +49 591 7108-660
F +49 591 7108-173
E export@kampmann.de
W Kampmanngroup.com

